



HANGZHOU ZHONGCE RUBBER CO., LTD.
www.chaoyang.com / www.zc-rubber.com


品牌推广:  TANGER 唐格境界 TEL: +86-571-87019839

2009 TIRE MANUAL

CHERISH A GREAT AMBITION & ALWAYS LEAD IN COMPETITION



Hangzhou Zhongce Rubber Co., Ltd is located in Hangzhou city of Zhejiang province, its manufacturing bases distributed as follow:

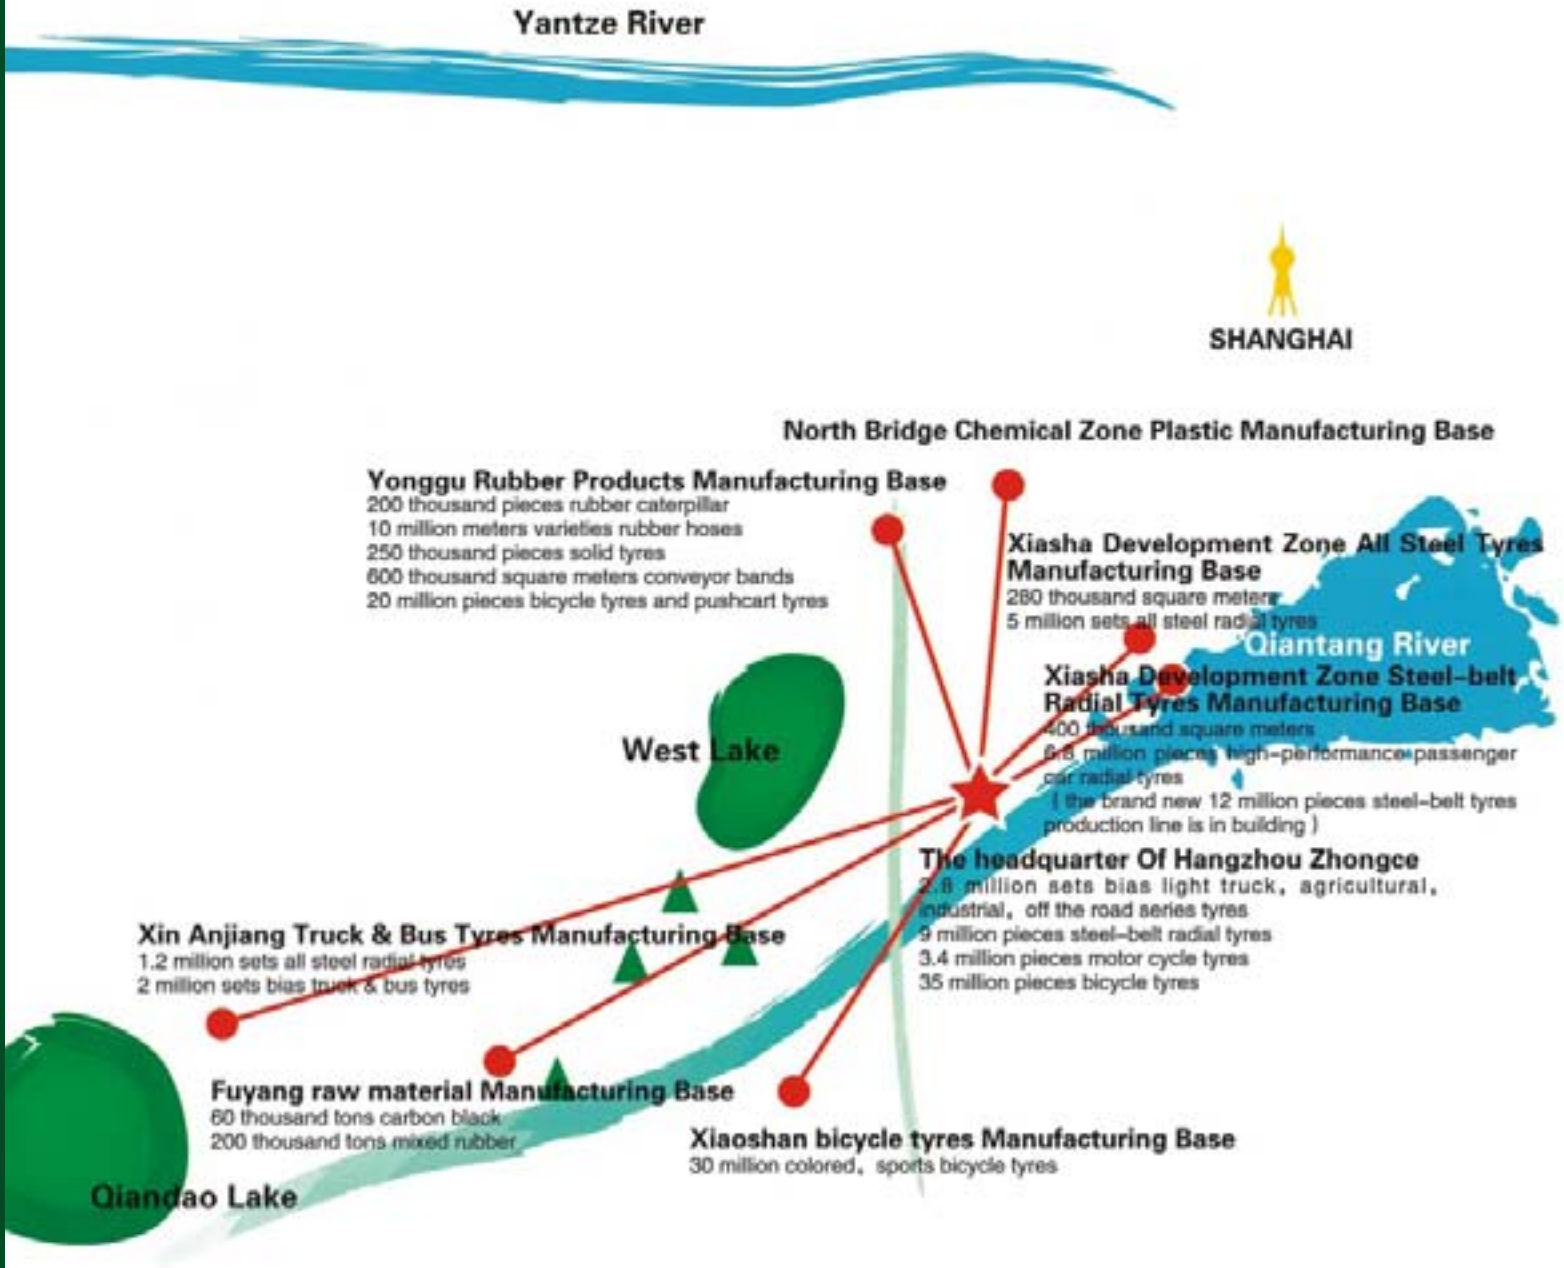

The four brands of Hangzhou Zhongce



ZHONGCE



Hangzhou Zhongce Rubber Co., Ltd was established in 1958 which mainly manufactures all kinds of rubber products including auto tires and bicycle tires and is also the pioneer in tire manufacturing enterprises.

The company has more than 12,000 employee and thousands of engineers and technicians.

So far, the company has possessed the largest and most completed production scale among rubber industry of china which has an annual production capacity of 27 million sets and more than 1 thousand different sizes of tires, including 6 million sets all-steel radial tires, 5 million sets bias tires, 16 million sets passenger car radial tires, and 3.4 million motorcycle tires, 80 million bicycle tires and 200 thousand pieces rubber crawler additionally.

The products of the company commands a good market both at home and abroad. The company is ranked 351st among China top 500 enterprises and 198th among China manufacturing industries, and No.1 of China domestic tire brand.

The company has obtained the ISO9001: 2000 certificate on quality management system and ISO14001: 2004 certificate on environmental management system; is the 1st enterprise which obtains the certificate of ISO/TS16949 automotive industry quality management system in tire manufacturing industry; and the first patch of enterprises to obtain “China Compulsory Certificate on tire industry”, and also ECE and DOT certificates. There are few enterprises as Zhongce which obtains “Chinese well-know trademark” and “Chinese well-know product” all together.

Hangzhou Zhongce Rubber Co., Ltd will continue to inherit its business philosophy of “innovation, pursuit of perfection, interactive, win-win”, set up enlarged scale, differed, and specialized integrated development, and build up the concepts of market, service, glory, sense of worth to provide all around service to our customers. The company will also continue to make great efforts on production of environmental protection products, take care of its employee and create harmonious working atmosphere. The company will work hard with our global and domestic distributors that feature cooperation and mutual benefit to provide top quality products to our customers and satisfy the different demands of them.

The company aims to develop itself to be a world's first-class enterprise owned advanced technology and high quality products and strive to accomplish sales revenue RMB 20 billions in 2010.



TECHNICAL GUARANTEE

World leading tyre technology in tyre manufacturing industry will be the best backing up, and advanced tyre manufacturing equipments and test instruments are reliable guarantee of high quality.

China Famous Trademark



China Famous Brand



TALENT GUARANTEE

Besides over thousands of technicians who have been trained through professional discipline, we have 3 senior engineers who enjoy the special subsidy from state government, 6 foreign experts, 34 senior engineers who work hard for your requirement.

CONTENTS

3-4 | *ZHONGCE*

6-35 | *ALL STEEL TRUCK AND BUS RADIAL TYRES*

36-39 | *ALL STEEL OFF THE ROAD TYRES*

40-51 | *BIAS TRUCK TYRES*

52-63 | *BIAS LIGHT TRUCK TYRES*

64-71 | *AGRICULTURAL TYRES*

72-75 | *INDUSTRIAL TYRES*

76-79 | *OFF THE ROAD TYRES*

80-83 | *SKIDSTEER TYRES*

84-89 | *SOLID TYRES*

90-118 | *SUMMARY OF TECHNICAL PARAMETERS*

2009 TIRE MANUAL



*ALL STEEL TRUCK AND
BUS RADIAL TYRES*

ALL STEEL TRUCK AND BUS RADIAL TYRES

CM998



ALL STEEL LOAD KING


CM998

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

It is designed to provide excellent traction and more grip which benefits from the pattern design of mixing with large blocks and longitudinal grooves, and simultaneously its robust structure will offer more load carrying capacity. The optimized abrasion and puncture resistance tread compound help the tyre obtain superior performance on a terrain in poor condition. It is designed for short and medium range service and the suggested running speed should be equal or less than 70km/hr.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
7.00R16	14	15.5	5.5F	118/114L
7.50R16	14	16.0	6.00G	122/118L
8.25R16	14	16.5	6.50H	126/122L
8.25R20	14+	16.5	6.5	136/134K
9.00R20	16	17.0	7.0	134/129K
10.00R20	16	18.0	7.5	146/143K
	18	18.0	7.5	149/146J
11.00R20	16	19.0	8.0	150/147K
	18	19.0	8.0	152/149J
12.00R20	18	20.5	8.5	154/151K

Sizes may be limited by market.

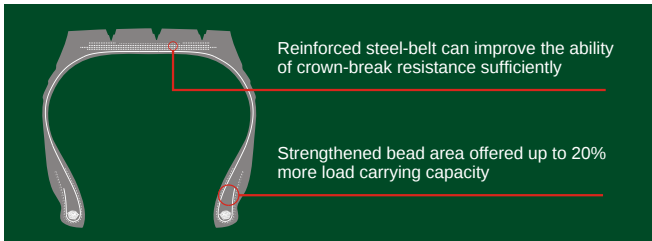

ALL STEEL TRUCK AND BUS RADIAL TYRES

CM958



MILEAGE GIANT


CM958

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

It is designed to be installed both on steering and driving axles of medium and long haul heavy trucks which serve on various highway terrains. It features a unique formulated tread compound to reduce irregular wear and abrasion loss rate, widened tread surface for more mileage, and the thousands of tiny sipes on shoulder can sufficiently decrease noise and operating temperature to offer superb ride comfort and safety.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8.25R15	18	14.0	6.5	143/141J
10.00R20	16	15.5	7.5	146/143K
10.00R20	18	15.5	7.5	149/146J
11.00R20	16	16.0	8.0	150/147K
11.00R20	18	16.0	8.0	152/149K
12.00R20	18	17.0	8.5	154/151K
11R22.5	16	17.5	8.25	148/145L
12R22.5	16	18.0	9.00	150/147L
	18	18.0	9.00	152/149L
295/80R22.5	16	18.0	9.00	150/147M
	18	18.0	9.00	152/149M
315/80R22.5	18	18.0	9.00	154/151M
		18.0	9.00	156/150L

Sizes may be limited by market.



The continuous shoulder blocks can prevent the tyre from irregular wear

New tread compound design can effectively reduce the building up of heat on tread area to extend its life span up to 20%

CM958 TUBE TYRE



CM958 TUBELESS TYRE



LONG HAUL LEOPARD


CM938

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

It is designed to be installed both on steering and driving axles of high speed and standard load vehicle for medium and long haul transportation. Its unique high abrasion and low heating tread compound will extend the life span of tyre greatly. Four-rib tread design provides excellent high speed and handling performance, especially suitable for trailer tyre of container truck. It is suggested to be used in coordination with CM993 (special for driving axle).

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	15.0	7.5	146/143K
11.00R20	16	16.0	8.0	150/147K
	18	16.0	8.0	152/149K
12.00R20	18	17.0	8.5	154/151K

Sizes may be limited by market.

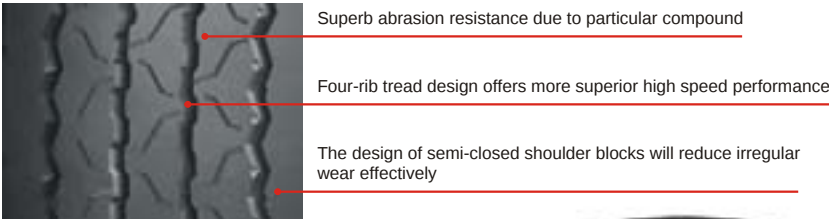



CM922 / CM925 / CM957

CHAORYANGYARTU GOODRIDE WESTLAKE



- FEA aided tyre structure design help optimize the profile of tyre deformed while loading
- Unique bead reinforcement design



Advanced ultra wear resistance reinforcing agent (I-H-N), served with ZNZ multi-functional rubber ingredient and anti-reversion agent help enhance tread wear-resistance, cool running and mileage.

- Excellent high speed performance.
- Unique tread compound offers exceptional wear resistance.
- Reasonable structure design ensures load carrying capacity.
- Reduced rolling resistance promoting low fuel consumption in balance with mileage, durability and casing endurance.
- 3 zig-zag grooves not only ensure low rolling resistance, improved handling and more grip, but also enhance traction and braking ability.

CM922 CHAORYANGYARTU

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	16	15.0	7.0	144/142K
10.00R20	16	15.5	7.5	146/143K
11.00R20	16	16.0	8.0	149/145K
	18	16.0	8.0	152/149K
12.00R20	18	17.0	8.5	154/149K

Sizes may be limited by market.

CM925 GOODRIDE / CM957 WESTLAKE

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11.00R20	16	16.0	8.0	149/145K
	18	16.0	8.0	152/149K
12.00R20	18	17.0	8.5	154/149K

Sizes may be limited by market.



DRIVE AXLE SPECIALIST

CM961

Load Capacity ★★★★★
Speed Performance ★★★★★☆
Abrasion Performance ★★★★★

- Optimized for drive axle service.
- Wide tread and deep grooves ensure exceptional wear resistance and outstanding year round traction.
- Offset shoulder blocks for excellent irregular-wear resistance and resist chunking and chipping.
- Effectively prevent stone from being trapped in grooves.
- Unique pattern design provides excellent traction designed for truck and bus running on freeway, national highway for medium and long haul service.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11.00R20	16	20.0	8.0	150/147K
	18	20.0	8.0	152/149K
12.00/R20	18	21.0	8.5	154/151K
12R22.5	18	21.0	9.00	152/149L
315/80R22.5	18	22.0	9.00	154/151L

Sizes may be limited by market.





CM913

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

- Designed for vehicles operating in mining and poor road condition, and also excellent for short and medium, low and medium drive axle service
- Wide blocks, and lateral full depth grooves help provide outstanding traction and braking ability as well as wear and penetration resistance.
- Strengthened tire casing and bead ensure excellent load carrying capacity.
- This tyre shows different advantage comparing to the tyre worked in mining for short haul and good road condition.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	14	20.0	7.0	141/139K
	16	20.0	7.0	144/142K
10.00R20	16	20.0	7.5	146/143K
	18	20.0	7.5	149/146L
11.00R20	16	20.5	8.0	150/147K
	18	20.5	8.0	152/149K
12.00R20	18	22.0	8.5	154/151K

Sizes may be limited by market.




CM997

- Designed for vehicles operating in mining and construction site.
- Unique lateral and full depth grooves help provide high levels of grip and traction.
- Lateral pattern blocks and puncture resistant compound ensure exceptional puncture and chunk resistance.
- Both excellent for on/off road service application as concrete mixer.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11.00R20	16	20.6	8.0	150/147K
	18	20.6	8.0	152/149K
295/80R22.5	16	20.6	9.00	150/147L
	18	20.6	9.00	152/149L

Sizes may be limited by market.



Special tread compound for poor and unimproved surface optimal penetration and wear resistance

Full-depth sipes provide excellent traction

Large block
Excellent chunk-resistance



ALL STEEL TRUCK AND BUS RADIAL TYRES

CR960E

BUS SPECIALIST


CR960E

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

The longitudinal-rib is specifically designed for city bus, and the sidewall is mainly reinforced to prevent the casing from damage and improve the safety and retread percentage of the tyre; the widened tread surface offer excellent stability and abrasion resistance; the pattern design of lower rolling resistance provides superior ride comfort and lower fuel consumption; the continuous shoulder blocks can prevent the tyre from irregular wear; the sipes on tread is helpful to reduce operating temperatures; and the deep tread depth and particular abrasion resistance compound are effectively extend its life span.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8.25R20	16	17.0	6.5	139/137K
10.00R20	16	19.0	7.5	146/143K
11R22.5	16	22.0	8.25	148/145J
275/70R22.5	18	21.0	8.25	152/148J
295/80R22.5	16	23.0	9.00	150/147J
	18	23.0	9.00	152/149J

Sizes may be limited by market.

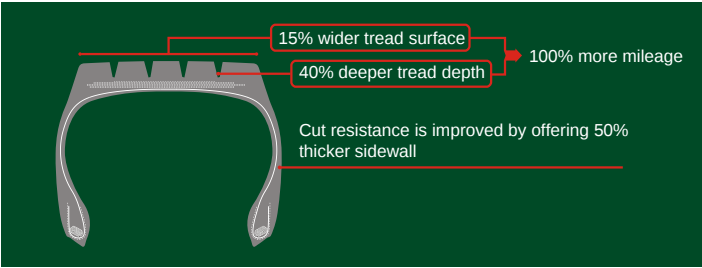

ALL STEEL TRUCK AND BUS RADIAL TYRES

CM966



CR966

Load Capacity ★★★★★
Speed Performance ★★★★★
Abrasion Performance ★★★★★

Its superior handling and ride comfort performance make it is suitable to be installed on saloon bus which serves on freeway and national highway, and it features low rolling resistance and well abrasion resistance tread compound to ensure low fuel consumption and more mileage.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	16	15.0	8.25	146/143L
295/80R22.5	16	15.0	9.00	150/147M

Sizes may be limited by market.



The unique tread compound can reduce building up of heat and improve abrasion resistance performance

Four-rib tread design ensures superior high speed performance

The enhanced structure design makes the tyre own excellent safety performance





CM910

YARTU

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	18	20.0	7.5	149/146L



CM912



Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
12.00R24	20	19.0	8.50	160/157J



CM923

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
13R22.5	16	20.0	9.75	152/149L
	18	20.0	9.75	154/151K



CM930

YARTU

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	20.0	7.5	146/143K
10.00R20	18	20.0	7.5	149/146J



CM954

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	16.0	7.5	146/143K
10.00R20	18	16.0	7.5	149/146J
11.00R20	16	15.0	8.0	150/147K
11.00R20	18	15.0	8.0	152/149K
11R22.5	14	16.0	8.25	143/139L
11R22.5	16	16.0	8.25	146/142L

Sizes may be limited by market.



CM973

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R24.5	16	15.0	8.25	149/146L



CM980(CM965)

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	20.6	8.25	144/142M
11R22.5	16	20.6	8.25	148/145L
11R24.5	14	20.6	8.25	146/143L
11R24.5	16	20.6	8.25	149/146L
285/75R24.5	14	20.6	8.25	144/141L.M
285/75R24.5	16	20.6	8.25	147/144L.M
295/75R22.5	14	20.6	9.00	144/141M
295/75R22.5	16	20.6	9.00	146/143M



CM982

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	20.6	8.25	144/142M
11R22.5	16	20.6	8.25	148/145L
11R24.5	14	20.6	8.25	146/143L
11R24.5	16	20.6	8.25	149/146L
285/75R24.5	14	20.6	8.25	144/141L
285/75R24.5	16	20.6	8.25	147/144L
295/75R22.5	14	20.6	9.00	144/141M
295/75R22.5	16	20.6	9.00	146/143M
295/80R22.5	16	20.6	9.00	150/147M
295/80R22.5	18	20.6	9.00	152/149M



CM983

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	20.6	8.25	144/142L
11R22.5	16	20.6	8.25	148/145L
11R24.5	14	20.6	8.25	146/143L
11R24.5	16	20.6	8.25	149/146L
285/75R24.5	14	20.6	8.25	144/141L
285/75R24.5	16	20.6	8.25	147/144L
295/75R22.5	14	20.6	9.00	144/141M
295/75R22.5	16	20.6	9.00	146/143M

Sizes may be limited by market.



CM985

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	19.0	7.5	146/143K
	18	19.0	7.5	149/146J
12R22.5	16	22.0	9.00	150/146K
12R22.5	18	22.0	9.00	152/148L
315/70R22.5	18	20.5	9.00	152/148M
315/70R22.5		20.5	9.00	154/150L
315/80R22.5	16	22.0	9.00	151/148M
315/80R22.5	18	22.0	9.00	154/151L
315/80R22.5		22.0	9.00	156/150M



CM986

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
205/75R17.5		14.0	6.00	122/120M
205/75R17.5		14.0	6.00	124/122M
215/75R17.5	14	14.5	6.00	126/124M
215/75R17.5	16	14.5	6.00	135/133J
225/70R19.5	12	15.0	6.75	125/123M
225/75R17.5		14.0	6.75	126/125M
225/75R17.5		14.0	6.75	129/127M
235/75R17.5	12	15.4	6.75	130/128M
235/75R17.5	14	15.4	6.75	132/130M
235/75R17.5		15.4	6.75	143/141J
245/70R19.5	14	15.4	7.50	133/131M
245/70R19.5	16	15.4	7.50	136/134M



CM987

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R16	16	15.0	6.50H	134/129L
9.00R20	16	16.0	7.0	144/142K
10.00R20	16	17.0	7.5	146/143K
10.00R20	18	17.0	7.5	149/146J
11.00R20	16	18.0	8.00	150/147K
11.00R20	18	18.0	8.00	152/149K
12.00R20	18	19.0	8.5	154/151K

Sizes may be limited by market.



CM987E YARTU

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	16	20.0	7.0	144/142K
10.00R20	18	20.0	7.5	149/146J
11.00R20	18	20.0	8.0	152/149K



CM988

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	15.5	7.5	146/143K
10.00R20	18	15.5	7.5	149/146J
11.00R20	16	16.0	8.0	150/147K
11.00R20	18	16.0	8.0	152/149K



CM993 Drive Axle Specialist

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	16	17.0	7.0	144/142K
10.00R20	16	18.0	7.5	146/143K
10.00R20	18	18.0	7.5	149/146J
11.00R20	16	19.0	8.0	150/147K
11.00R20	18	19.0	8.0	152/149K
12.00R20	18	20.0	8.5	154/151K
11R22.5	14	20.6	8.25	144/142M
11R22.5	16	20.6	8.25	148/145L
295/80R22.5	16	20.6	9.00	150/147M
295/80R22.5	18	20.6	9.00	152/149M
315/80R22.5	16	20.6	9.00	151/148M
315/80R22.5	18	20.6	9.00	154/151M
315/80R22.5		20.6	9.00	156/150M

Sizes may be limited by market.



CR859

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8.5R17.5	12	12.0	6.00	121/120L
9.5R17.5	14	13.0	6.75	129/127L



CR915



Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	11.0	8.25	144/142M
295/75R22.5	14	11.0	9.00	144/141M



CR926

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
7.00R16	14	11.0	5.50F	118/114M
7.50R16	14	12.0	6.00G	122/118L
7.50R20	14	14.0	6.0	130/128L
8.25R16	14	14.0	6.50H	126/122L
8.25R16	16	14.0	6.50H	128/124L
8.25R20	14	15.0	6.5	136/134K
9.00R16	14	15.0	6.50H	131/126L
9.00R20	14	15.5	7.0	141/139K
9.00R20	16	15.5	7.0	144/142K
10.00R20	16	16.0	7.5	146/143K
10.00R20	18	16.0	7.5	149/146J
11.00R20	16	16.0	8.0	150/147K
11.00R20	18	16.0	8.0	152/149K
12.00R20	18	17.5	8.5	154/151K



CR926A

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	14	15.5	7.0	141/139K
9.00R20	16	15.5	7.0	144/142K

Sizes may be limited by market.



CR926B

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	16.0	7.5	146/143K
10.00R20	18	16.0	7.5	149/146J
11.00R20	16	17.0	8.0	150/147K
11.00R20	18	17.0	8.0	152/149K
12.00R24	18	19.0	8.5	158/155K
12.00R24	20	19.0	8.5	160/157K
315/80R22.5	16	16.5	9.0	151/148M
315/80R22.5	18	16.5	9.0	154/151M
315/80R22.5		16.5	9.0	156/150M



CR926D

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	16.8	8.25	144/142M
11R22.5	16	16.8	8.25	148/145M



CR926E

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11.00R20	18	19.5	8.0	152/149K
12.00R20	18	20.5	8.5	154/149J



CR944

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	15.0	7.5	146/143K
11.00R20	16	15.0	8.0	150/147K
11.00R20	18	15.0	8.0	152/149K
11R22.5	14	15.0	8.25	143/139L
11R22.5	16	15.0	8.25	146/142L

Sizes may be limited by market.



CR950

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8R22.5	12	13.0	6.00	128/127M
	14	13.0	6.00	130/128M
9R22.5	12	14.0	6.75	133/131M
	14	14.0	6.75	136/134M
10R22.5	14	15.0	7.50	140/138M
	16	15.0	7.50	144/142M



CR963

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	17.0	7.5	146/143K



CR964

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
12.00R20	18	17.5	8.5	154/151K



CR970

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8R22.5	12	13.0	6.00	128/127M
8R22.5	14	13.0	6.00	130/128M
9R22.5	12	13.0	6.75	133/131L.M
9R22.5	14	13.0	6.75	136/134M
10R22.5	14	14.3	7.50	140/138M
10R22.5	16	14.3	7.50	144/142M

Sizes may be limited by market.



CR960

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	14.2	8.25	144/142L
11R22.5	16	14.2	8.25	146/143L
11R24.5	14	14.2	8.25	146/143L
11R24.5	16	14.2	8.25	149/146L
285/75R24.5	14	14.2	8.25	144/141L
285/75R24.5	16	14.2	8.25	147/144L
295/75R22.5	14	14.2	9.00	144/141L
295/75R22.5	16	14.2	9.00	146/143L
295/80R22.5	16	15.0	9.00	150/147M
295/80R22.5	18	15.0	9.00	152/149M
315/80R22.5	16	15.0	9.00	151/148M
315/80R22.5	18	15.0	9.00	154/151M
315/80R22.5	/	15.0	9.00	156/150M



CR960A

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
7.50R16	14	12.0	6.00G	122/118L
8R19.5	12	13.0	6.00	124/122L
8.25R16	14	13.0	6.50H	126/122L
205/75R17.5	/	12.0	6.00	122/120M
205/75R17.5	/	12.0	6.00	124/122M
215/75R17.5	14	12.5	6.00	126/124M
215/75R17.5	16	12.5	6.00	135/133J
225/70R19.5	12	13.0	6.75	125/123M
225/75R17.5	/	12.5	6.75	126/125M
225/75R17.5	/	12.5	6.75	129/127M
235/75R17.5	12	13.3	6.75	130/128M
235/75R17.5	14	13.3	6.75	132/130M
235/75R17.5	/	13.3	6.75	143/141J
245/70R19.5	14	13.0	7.50	133/131M
245/70R19.5	16	13.0	7.50	136/134M
315/70R22.5	18	15.0	9.00	152/148M
315/70R22.5	/	15.0	9.00	154/150L

Sizes may be limited by market.



CR975

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
7.50R20	14	13.0	6.0	130/128K.L
8.25R20	14	14.0	6.5	136/134 K



CR976A

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	14	14.5	7.0	141/139K
9.00R20	16	14.5	7.0	144/142K
10.00R20	16	15.0	7.5	146/143K
10.00R20	18	15.0	7.5	149/146J
11.00R20	16	15.5	8.0	150/147K
11.00R20	18	15.5	8.0	152/149K
11R22.5	14	15.5	8.25	144/142M
11R22.5	16	15.5	8.25	146/143L
12.00R20	18	17.0	8.50	154/151K
12R22.5	16	15.5	9.00	150/146L
12R22.5	18	15.5	9.00	152/148L
215/75R17.5	14	12.5	6.00	126/124M
215/75R17.5	16	12.5	6.00	135/133J
225/70R19.5	12	13.0	6.75	125/123M
245/70R19.5	14	13.0	7.50	133/131M
245/70R19.5	16	13.0	7.50	136/134M
255/70R22.5	16	14.5	7.50	140/137M
265/70R19.5	14	14.0	7.50	137/134M
265/70R19.5	16	14.0	7.50	140/138M
275/70R22.5	16	14.0	8.25	148/145M
275/70R22.5		14.0	8.25	152/148J
275/80R22.5	16	14.0	8.25	149/146M
295/80R22.5	16	15.0	9.00	150/147M
295/80R22.5	18	15.0	9.00	152/149M
315/80R22.5	18	18.0	9.00	154/151M
315/80R22.5		18.0	9.00	156/150L
385/65R22.5	18	15.5	11.75	160K+158L
425/65R22.5	20	15.0	13.00	165K
445/65R22.5	20	15.0	14.00	169K

Sizes may be limited by market.



CR989

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
11R22.5	14	14.2	8.25	144/142L
11R22.5	16	14.2	8.25	148/145M
11R24.5	16	14.2	8.25	149/146L
11R24.5	14	14.2	8.25	146/143L
285/75R24.5	14	14.2	8.25	144/141L
285/75R24.5	16	14.2	8.25	147/144L
295/75R22.5	14	14.2	9.00	144/141L
295/75R22.5	16	14.2	9.00	146/143L



CB945

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
10.00R20	16	15.0	7.5	146/143K
10.00R20	18	15.0	7.5	149/146J



CB972

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
9.00R20	16	22.0	7.0	144/142F
10.00R20	16	24.0	7.5	146/143C.F
10.00R20	18	24.0	7.5	149/146C.F
11.00R20	18	24.5	8.0	152/149C.F
12.00R20	18	25.5	8.5	154/151F
12.00R24	18	25.0	8.5	158/155F
11R22.5	14	23.0	8.25	144/142F
11R22.5	16	23.0	8.25	148/145F
12R22.5	16	24.5	9.00	150/147F

Sizes may be limited by market.



CB981

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8.25R16	14	16.5	6.50H	126/122L
9.00R20	16	18.0	7.0	144/142K
10.00R20	16	19.5	7.5	146/143K
10.00R20	18	19.5	7.5	149/146J
11.00R20	16	20.5	8.0	150/147K
11.00R20	18	20.5	8.0	152/149J
12.00R20	18	20.5	8.5	154/151K



CB995

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
8.25R16	14	16.5	6.50H	126/122L
9.00R20	16	17.0	7.0	144/142K
10.00R20	16	18.0	7.5	146/143K
10.00R20	18	18.0	7.5	149/146J
11.00R20	16	19.0	8.0	149/147K
11.00R20	18	19.0	8.0	152/149J
12.00R20	18	20.0	8.5	154/151K



CB999

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
7.50R16	8	15.0	6.00G	122/118N
	10	15.0	6.00G	116/114N
	14	15.0	6.00G	122/121M
14.00R20	18	19.5	10.00	161/158J

Sizes may be limited by market.

2009 TIRE MANUAL



ALL STEEL OFF THE ROAD TYRES



CB760 / CB761

The CB760 which can offer superb traction, more grips, enhanced cut resistance and increased puncture resistance on the road thanks to its large block pattern design and flexible tread is suitable to be used in mines and construction sites.



CB760

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
20.5R25	★★	28.5	17.00/2.0	177B
23.5R25	★★	35.5	19.50/2.5	185B
	★	35.5	19.50/2.5	192A2

Sizes may be limited by market.

CB761

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
26.5R25	★★	37.0	22.00/3.0	193B
	★	37.0	22.00/3.0	202A2
21.00R35	★★	44.0	15.00/3.0	201B

Sizes may be limited by market.

ALL STEEL OFF THE ROAD TYRES
CR766

CR766

- Exclusively for container handler, mobile crane and reach stacker.
- Unique tread compound provides excellent wear, scrub and cut resistance.
- Excellent ride and vehicle stability and optimal turning responsiveness, designed for industrial, ports and intermodal centers operations.
- High mileage.

Size	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating
16.00R25	★★	50.0	11.25/2.0	200A5

Sizes may be limited by market.



2009 TIRE MANUAL



BIAS TRUCK TYRES





Unique large block pattern provides superior driving ability and traction as well as enhanced puncture and tear resistance



CL991

CL991 offers superb traction, enhanced durability, increased puncture resistance, superior cut and abrasion resistance on the road thanks to its unique pattern design of deepened lug pattern and super wide tread surface and tread compound; and shows perfect performance during service on rocks and coal as well as mud terrain which is more easily to cut the tread. It is suitable to be mounted on low speed short range special purpose vehicle such as dump truck and concrete mixer; load ≤ 120%, speed ≤ 50km/h. There are 3 types of CL991 in different compound designs: ① cement mixer, low PR; ② mine specialist, high PR ③ port specialist.


Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	26.0	7.0
10.00-20	16	28.0	7.5
10.00-20	18	28.0	7.5
11.00-20	16	30.0	8.0
11.00-20	18	30.0	8.0
12.00-20	18	30.0	8.5

Sizes may be limited by market.



CR992

The CR992 featuring unique pattern design which will effectively prevent stone from being trapped in grooves offers optimal abrasion resistance, excellent side-skidding characteristics and superior handling stability and is especially suitable to be mounted on the front wheel of medium and long haul truck and bus; speed ≤90km/h, load ≤120%.



Size	PR	Tread Depth (mm)	Standard Rim
7.50-20	14	15.5	6.0
8.25-20	14	16.5	6.5
9.00-20	16	15.0	7.0
10.00-20	16	16.0	7.5
11.00-20	18	16.0	8.0
12.00-20	18	16.0	8.5

Sizes may be limited by market.



BIAS TRUCK TYRES

CR992/CL939B



CL939B

- Latest technology help reduce heat generating on shoulder and crown to avoid separation.
- Deepen tread grooves ensure longer service life.
- Integral rigidity ensures enhanced ground grip.

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	18.0	7.0
10.00-20	16	19.0	7.5
11.00-20	18	20.0	8.0

Sizes may be limited by market.

2009TIRE MANUAL



CR918

Size	PR	Tread Depth (mm)	Standard Rim
11-22.5	12	10.3	8.25
10.00-20	14	11.0	7.5



CR936

Size	PR	Tread Depth (mm)	Standard Rim
11.00-20	16	15.0	8.0
11.00-20	18	15.0	8.0
12.00-20	18	15.0	8.5
12.00-24	18	16.0	8.5



CR940

Size	PR	Tread Depth (mm)	Standard Rim
11.00-22	16	15.0	8.0



CR942

Size	PR	Tread Depth (mm)	Standard Rim
8.25-20	14	14.0	6.5
8.25-20	16	14.0	6.5
9.00-20	14	14.0	7.0
9.00-20	16	14.0	7.0
10.00-20	16	15.0	7.5



CR943

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	17.0	7.5
10.00-20	18	17.0	7.5

Sizes may be limited by market.



CR948

Size	PR	Tread Depth (mm)	Standard Rim
7.00-20	14	13.0	5.5
7.50-20	14	13.5	6.0
9.00-20	14	14.0	7.0
9.00-20	16	14.0	7.0
10.00-20	16	14.0	7.5
11.00-20	16	15.0	8.0
11.00-20	18	15.0	8.0



CR949

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	15.0	7.0
10.00-20	16	16.0	7.5



CR952

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	17.5	7.0
10.00-20	16	19.0	7.5
10.00-20	18	19.0	7.5
11.00-20	16	19.0	8.0
11.00-20	18	19.0	8.0



CR990

Size	PR	Tread Depth (mm)	Standard Rim
7.50-20	14	12.5	6.0
11.00-20	18	15.5	8.0

Sizes may be limited by market.



CR992H

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	19.0	7.5



CL908

Size	PR	Tread Depth (mm)	Standard Rim
14.00-20	18	20.0	10.0
14.00-20	20	20.0	10.0



CL909

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	20.0	7.0
11.00-20	18	22.0	8.0
12.00-20	18	23.0	8.5
12.00-20	20	23.0	8.5



CL916

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	20.0	7.5
10.00-20	18	22.0	7.5



CL935

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	22.0	7.5
10.00-20	18	22.0	7.5

Sizes may be limited by market.



CL928

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	14	14.5	7.0
9.00-20	16	14.5	7.0
10.00-20	16	15.0	7.5
11.00-20	16	17.0	8.0
11.00-20	18	17.0	8.0
12.00-20	18	17.0	8.5
12.00-24	18	17.0	8.5



CL939

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	18.0	7.0
10.00-20	16	19.0	7.5
11.00-20	18	20.0	8.0



CL939A

Size	PR	Tread Depth (mm)	Standard Rim
8.25-20	14	17.0	6.5
9.00-20	16	18.0	7.0
10.00-20	16	19.0	7.5
11.00-20	18	20.0	8.0
12.00-20	18	20.0	8.5



CL946

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	14	16.0	7.0
9.00-20	16	16.0	7.0
10.00-20	16	17.0	7.5
11.00-20	16	17.0	8.0
11.00-20	18	17.0	8.0
12.00-20	18	18.0	8.5

Sizes may be limited by market.



CL950

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	23.5	7.5
10.00-20	18	23.5	7.5



CL951

Size	PR	Tread Depth (mm)	Standard Rim
7.00-20	14	13.0	5.5
7.50-20	14	14.0	6.0
8.25-20	14	14.0	6.5
9.00-20	16	16.0	7.0
10.00-20	16	16.0	7.5
11.00-20	18	17.0	8.0
12.00-20	18	17.5	8.5
12.00-24	18	17.5	8.5
13.00-20	18	19.0	9.0
14.00-20	18	19.0	10.0



CL955

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	19.0	7.5
11.00-20	18	17.0	8.0
12.00-20	18	17.0	8.5



CL956

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	22.0	7.5
10.00-20	18	22.0	7.5
11.00-20	16	22.0	8.0
11.00-20	18	22.0	8.0
12.00-20	18	22.0	8.5

Sizes may be limited by market.



CL959

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	16.0	7.0
10.00-20	16	16.0	7.5
11.00-20	18	17.0	8.0
12.00-20	18	18.0	8.5



CL962

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	22.0	7.5
11.00-20	16	22.0	8.0
11.00-20	18	22.0	8.0



CL965

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	23.5	7.5
10.00-20	18	23.5	7.5



CL969

Size	PR	Tread Depth (mm)	Standard Rim
11.00-20	18	23.0	8.0
11.00-20	20	23.0	8.0
12.00-20	18	23.0	8.5
12.00-20	20	23.0	8.5
12.00-24	18	23.0	8.5
12.00-24	20	23.0	8.5

Sizes may be limited by market.



CL977

Size	PR	Tread Depth (mm)	Standard Rim
9.00-20	16	15.5	7.0
10.00-20	16	16.0	7.5
11.00-20	16	17.0	8.0
11.00-20	18	17.0	8.0
12.00-20	18	17.0	8.5



CM920

Size	PR	Tread Depth (mm)	Standard Rim
11.00-20	18	19.5	8.0



CM937

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	15.0	8.5
12.00-20	18	15.0	8.5
12.00-24	18	15.0	8.5



CM953

Size	PR	Tread Depth (mm)	Standard Rim
12.00-24	18	15.0	8.5

Sizes may be limited by market.

2009 TIRE MANUAL



BIAS LIGHT TRUCK TYRES

BIAS LIGHT TRUCK TYRES
CR856



Deepened lug pattern and wider tread surface, suit to be mounted on short range haulage vehicles such as trailer and fork-lift truck served on normal condition terrain




CL856

The CL856 could never be mounted with normal tyre in a same axle due to its 20mm larger in overall diameter comparing to normal tyre; its deeper lug pattern and wider tread surface help to offer excellent abrasion and puncture resistance, improved mileage and more grips and effectively prevent the stone from being trapped in grooves; it is suitable to be used on short range haulage vehicles such as trailer and fork-lift truck on normal terrain; speed ≤110km/h, load ≤120%.

Size	PR	Tread Depth (mm)	Standard Rim
7.50-16	14	18.0	6.00G
7.50-16	16	18.0	6.00G

Sizes may be limited by market.

BIAS LIGHT TRUCK TYRES
CR892



The unique pattern design can effectively prevent stone from being trapped in grooves and ensure superb handling performance; especially suits to be mounted on front wheel of medium and long haul truck and bus



CR892

The toughness and robustness of the CR892 which provides optimal handling performance, excellent side-skidding characteristics, low heats building up and less flex and effectively prevents stone from being trapped makes it prefect to be mounted on any axle of truck and bus for medium or long haul transportation; tread: high abrasion resistance and low heats building up; casing: low heats building up and enhanced adhesion; speed ≤110km/h, load ≤120%.

Size	PR	Tread Depth (mm)	Standard Rim
6.50-15	8+	10.7	4.50E
7.00-15	10	13.0	5.50F
6.50-16	12	10.0	5.50F
7.00-16	12	13.0	5.50F
7.50-16	14	13.8	6.00G
8.25-16	14	14.0	6.50H



CL827

Size	PR	Tread Depth (mm)	Standard Rim
6.00-16	8	10.0	4.50E
6.00-16	10	10.0	4.50E
6.50-14	10	11.0	41/2J
6.50-16	8	10.0	5.50F
6.50-16	10	10.0	5.50F
6.50-16	12	10.0	5.50F
7.00-16	10	12.0	5.50F
7.00-16	12	12.0	5.50F
7.00-16	14	12.0	5.50F
7.50-16	12	13.0	6.00G
7.50-16	14	13.0	6.00G
8.25-16	14	14.0	6.50H



CL830

Size	PR	Tread Depth (mm)	Standard Rim
6.00-13	10	8.0	41/2J
6.00-14	10	10.0	41/2J
6.50-16	12	8.0	5.50F



CL835

Size	PR	Tread Depth (mm)	Standard Rim
6.00-15	8	10.0	4.50E



CL839

Size	PR	Tread Depth (mm)	Standard Rim
7.00-15	10	9.5	5.50F



CL839A

Size	PR	Tread Depth (mm)	Standard Rim
6.50-16	12	12.5	5.50F
7.00-16	14	14.0	5.50F
7.50-16	14	15.0	6.00G
8.25-16	16	15.0	6.50H
9.00-16	14	16.0	6.50H



CL851

Size	PR	Tread Depth (mm)	Standard Rim
6.50-16	12	10.0	5.50F
7.50-16	14	12.5	6.00G
8.25-16	16	14.0	6.50H



CL859

Size	PR	Tread Depth (mm)	Standard Rim
6.50-16	12	10.0	5.50F
7.50-16	14	12.5	6.00G
8.25-16	14	13.5	6.50H



CL865

Size	PR	Tread Depth (mm)	Standard Rim
8.25-16	16	16.0	6.50H
7.50-16	14	15.0	6.00G

Sizes may be limited by market.

Sizes may be limited by market.



CL891

Size	PR	Tread Depth (mm)	Standard Rim
8.25-16	16	19.0	6.50H



CL951

Size	PR	Tread Depth (mm)	Standard Rim
6.00-13	10	10.0	41/2J
6.50-16	12+	10.0	5.50F
7.00-15	10	11.0	5.50F
7.00-15	12	11.0	5.50F
7.00-16	14+	11.0	5.50F



CM822

Size	PR	Tread Depth (mm)	Standard Rim
6.00-15	8	10.0	4.50E



CM828

Size	PR	Tread Depth (mm)	Standard Rim
7.50-16	8	12.0	6.00G



CM834

Size	PR	Tread Depth (mm)	Standard Rim
5.00-12	10	8.0	3.50B
5.50-13	10	8.0	4J

Sizes may be limited by market.



CM847

Size	PR	Tread Depth (mm)	Standard Rim
7.50-16	14	13.0	6.00G
9.00-16	14	13.5	6.50H



CR218

Size	PR	Tread Depth (mm)	Standard Rim
6.00-12	6	9.0	4.50B



CR224

Size	PR	Tread Depth (mm)	Standard Rim
4.00-12	4	7.0	2.50C



CR225

Size	PR	Tread Depth (mm)	Standard Rim
5.60-13	4	6.5	4J



CR802

Size	PR	Tread Depth (mm)	Standard Rim
6.50-16	12	10.0	5.50F
7.00-16	12	13.0	5.50F

Sizes may be limited by market.



CR820

Size	PR	Tread Depth (mm)	Standard Rim
4.50-12	6	8.0	3.00B
5.00-12	8	9.0	3.50B
6.00-13	8	10.0	41/2J
6.00-14	8	10.0	41/2J
6.50-14	8	10.0	41/2J
7.00-15	8	10.0	5.50F
7.00-15	10	10.0	5.50F



CR821

Size	PR	Tread Depth (mm)	Standard Rim
5.50-13	8	9.0	4J



CR823

Size	PR	Tread Depth (mm)	Standard Rim
5.00-10	8	7.5	3.50B
6.50-15	8	11.0	4.50E
6.50-15	10	11.0	4.50E



CR826

Size	PR	Tread Depth (mm)	Standard Rim
7.50-16	12	12.0	6.00G
7.50-16	14	12.0	6.00G



CR829

Size	PR	Tread Depth (mm)	Standard Rim
5.00-12	8	9.0	3.50B

Sizes may be limited by market.



CR831

Size	PR	Tread Depth (mm)	Standard Rim
4.50-12	8	8.0	3.00B
6.00-14	6	8.0	41/2J



CR832

Size	PR	Tread Depth (mm)	Standard Rim
6.00-14	8	7.5	41/2J
6.00-14	8	9.5	41/2J
6.00-15	10	8.0	4.50E
6.50-14	8	7.5/9.5	41/2J
6.50-15	10	8.5	4.50E
6.50-16	8	9.0	5.50F
6.50-16	10	9.0	5.50F
6.50-16	12	9.0	5.50F
7.00-15	10	10.0	5.50F
7.00-15	12	10.0	5.50F
7.50-16	12	10.0	6.00G
7.50-16	14	10.0	6.00G



CR833

Size	PR	Tread Depth (mm)	Standard Rim
7.00-16	10	11.0	5.50F
7.00-16	12	11.0	5.50F
7.00-16	14	11.0	5.50F
7.00-16	14+	11.0	5.50F



CR845

Size	PR	Tread Depth (mm)	Standard Rim
6.50-14	10	10.5	41/2J

Sizes may be limited by market.



CR848

Size	PR	Tread Depth (mm)	Standard Rim
8-14.5TL	12	7.0	6.0
8-14.5TL	14	7.0	6.0



CR852

Size	PR	Tread Depth (mm)	Standard Rim
6.50-14	10	8.0/9.5	41/2J
6.50-16	12	10.5	5.50F
7.50-15	12	10.5	6.00G
7.50-16	14	13.5	6.00G
7.50-16	16	13.5	6.00G



CR881

Size	PR	Tread Depth (mm)	Standard Rim
6.00-13	8+	10.0	41/2J
6.50-16	10	10.0	5.50F
6.50-16	12	10.0	5.50F
7.00-16	12	10.5	5.50F



CR890

Size	PR	Tread Depth (mm)	Standard Rim
8.25-16	14	12.0	6.50H

Sizes may be limited by market.

2009 TIRE MANUAL



AGRICULTURAL TYRES



CB522

Size	PR	Tread Depth (mm)	Standard Rim
6.00-12(17 Pitch)	6	24.0	4.50E
6.00-12(20 Pitch)	6	24.0	4.50E
6.00-12(All Steel Load King-17 Pitch)	6	22.0	4.50E



CB523

Size	PR	Tread Depth (mm)	Standard Rim
5.00-12	4	24.0	4.00E
15-24	10	33.0	DW14



CB527

Size	PR	Tread Depth (mm)	Standard Rim
6.00-12(Pitch)	6	22.0	4.50E
6.00-12(Reinforced)	6	24.0	4.50E
7.50-16	8	24.0	5.50F



CB527A

Size	PR	Tread Depth (mm)	Standard Rim
6.00-12(14 Pitch)	6	22.0	4.50E

Sizes may be limited by market.



CB528

Size	PR	Tread Depth (mm)	Standard Rim
23×10-10	4	28.0	8.00I



CB529

Size	PR	Tread Depth (mm)	Standard Rim
12.4/11-28	4	32.0	W11
12.4/11-28	6	32.0	W11
12.4/11-28	8	32.0	W11



CB530

Size	PR	Tread Depth (mm)	Standard Rim
6.00-12	6	24.0	4.50E



CB535/R-1

Size	PR	Tread Depth (mm)	Standard Rim
7.5-20	8	26.0	5.50F
8.3-20	4	30.0	W7
8.3-20	6	30.0	W7
9.5-20	6	33.0	W8
11-32	6	36.0	W10

Sizes may be limited by market.



CB535TL

Size	PR	Tread Depth (mm)	Standard Rim
230/95-48	16	32.0	W7



CB536/PR-1

Size	PR	Tread Depth (mm)	Standard Rim
8.3-24	6	80.0	W7
8.3-24	8	80.0	W7
9.5-24	6	80.0	W8
9.5-24	8	80.0	W8
11-28	6	85.0	W10
11-32	6	85.0	W10

CB537/R-1

Size	PR	Tread Depth (mm)	Standard Rim
12.4/11-24	6	36.0	W11
16.9/14-28	8	39.0	W15L



CB538/R-1

Size	PR	Tread Depth (mm)	Standard Rim
8.3-24	6	30.0	W7
8.3-24	8	30.0	W7
9.5-24	6	33.0	W8
9.25-24	8	33.0	W8
11-32	6	36.0	W10
11.2-24	4	35.0	W10
11.2-24	6	35.0	W10
11.2-28	6	35.0	W10
11.2-28	4	35.0	W10
11.2-28	4	36.0	W11
11.2-28	8	35.0	W10
12.4-24	6	36.0	W11
12.4-24	8	36.0	W11
12.4-28	6	36.0	W11
12.4-28	8	36.0	W11
12.4-38	4	36.0	W11
13.6-28	6	36.0	W12
13.6-28	8	36.0	W12
13.6-28	10	36.0	W12
13.6-38	6	36.0	W12
14.9-24	8	38.0	W13
14.9-28	6	38.0	W13
14.9-28	8	38.0	W13
14.9-30	10	38.0	W13
14.9-38	6	38.0	W13
14.9-38	8	38.0	W13
15.5-38	6	37.5	W14L
16.9-24	6	39.0	W15L
16.9-28	6	39.0	W15L
16.9-30	8	39.0	W15L
16.9-34	8	39.0	W15L
16.9-38	6	39.0	W15L
18.4-30	6	38.0	W16L
18.4-30	8	38.0	DW16A
18.4-34	6	40.0	DW16A
18.4-38	6	40.0	W16L
18.4-38	8	40.0	W16L
20.8-38	8	40.0	W18L

Sizes may be limited by market.

Sizes may be limited by market.



CB538TL

Size	PR	Tread Depth (mm)	Standard Rim
11.2-38	4	30.0	W10
14.9-24	4	38.0	W12
24.5-32	12	43.0	DW21A
30.5L-32	12	43.0	DW27A

CB539/R-2

Size	PR	Tread Depth (mm)	Standard Rim
10-15	8	9.0	9×15.3
11.2-24	8	63.0	W10
11.2-24	8	63.0	W10



CB590/PR-1

Size	PR	Tread Depth (mm)	Standard Rim
8.3-20	6	70.0	W7
8.3-20	8	70.0	W7
11.2-24	6	82.0	W10



CM519

Size	PR	Tread Depth (mm)	Standard Rim
4.00-8	4	7.0	3.00D

Sizes may be limited by market.



CM521

Size	PR	Tread Depth (mm)	Standard Rim
4.50-14	8	8.5	3.00D
4.50-16	6	10.5	3.00D
4.50-16	8	10.5	3.00D
5.00-16	8	10.5	4.00E
5.00-16	10	10.5	4.00E
5.00-16	10	10.0	4.00E



CR520

Size	PR	Tread Depth (mm)	Standard Rim
4.00-16	4	12.0	3.00D
6.00-16	6	14.0	4.00E



CR525

Size	PR	Tread Depth (mm)	Standard Rim
4.00-8	6	7.0	3.00D



CR532

Size	PR	Tread Depth (mm)	Standard Rim
6.00-16	6	11.5	4.00E

Sizes may be limited by market.



CR534/F-2

Size	PR	Tread Depth (mm)	Standard Rim
6.50-20	4	17.5	5.00F
6.50-20	6	17.5	5.00F
6.50-20	8	17.5	5.00F
7.50-16	6	17.5	5.00F



CR823

Size	PR	Tread Depth (mm)	Standard Rim
4.00-10	6	6.0	3.00D



CR881

Size	PR	Tread Depth (mm)	Standard Rim
4.50-14	8	8.5	3.00D
5.00-14	8	8.5	3.00D

Sizes may be limited by market.

2009 TIRE MANUAL



INDUSTRIAL TYRES



CL618

Size	PR	Tread Depth (mm)	Standard Rim
6.50-15	8+	10.7	4.50E
7.00-15	10	13.0	5.50F
6.50-16	12	10.0	5.50F
7.00-16	12	13.0	5.50F
7.50-16	14	13.8	6.00G
8.25-16	14	14.0	6.50H



CL619

Size	PR	Tread Depth (mm)	Standard Rim
5.00-8	10	12.0	3.50D
6.00-9	10	13.0	4.00E
6.50-10	10	13.0	5.00F
7.00-12	12	15.0	5.00S
7.00-15	12	15.0	5.5
7.50-15	12	17.0	6.0
8.25-15	14	16.0	6.5
28×9-15/815-15	14	13.0	7.0
28×9-15/815-15	16	13.0	7.0
18×7-8	14	14.0	4.33R
21×8-9	14	15.5	6.00E
23×9-10	16	16.0	6.50F
250-15	16	21.5	7.5
300-15	18	22.0	8.0



CL621

Size	PR	Tread Depth (mm)	Standard Rim
5.00-8	10	11.0	3.50D
6.00-9	10	12.5	4.00E
6.50-10	10	12.0	5.00F
7.00-9	10	10.0	5.00S
7.00-12	12	13.0	5.00S
8.25-12	12	19.0	6.5
8.25-15	14	15.0	6.5
8.25-20	14	15.0	6.5
28×9-15/815-15	14	18.5	7.0
18×7-8	14	16.0	4.33R
23×9-10	16	14.0	6.50F
27×10-12	14	14.0	8.00G
9.00-16	14	16.0	6.50H

Sizes may be limited by market.



CL622

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	16	22.0	7.5
12.00-20	16	25.0	8.5



CL624

Size	PR	Tread Depth (mm)	Standard Rim
23×8.5-12	6	13.0	7JA
23×8.5-15	6	12.5	7JA



CL626

Size	PR	Tread Depth (mm)	Standard Rim
10.00-20	18	26.5	7.5
12.00-20	20	26.5	8.5



CL627

Size	PR	Type	Tread Depth (mm)	Standard Rim
18.00-25	40	TL	43.0	13.0/2.5
18.00-25	44	TL	43.0	13.0/2.5

Sizes may be limited by market.



New

CL628

Wear Resistance King Kong

Size	PR	Type	Tread Depth (mm)	Standard Rim
6.00B9	10	TT	13.0	4.00E
7.00B9	10	TT	13.0	5.00S
6.50B10	10	TT	15.0	5.00F
7.00B12	12	TT	17.0	5.00S
8.25B12	12	TT	16.5	6.5
8.25B15	14	TT	15.5	6.5
28×9B15	14	TT	16.0	7.0



CL629

Size	PR	Type	Tread Depth (mm)	Standard Rim
18.00-25	40	TT/TL	55.0	13.0/2.5
14.00-24	24	TT	50.0	10.0
12.00-24	20	TT	35.0	8.5
12.00-24	24	TT	35.0	8.5



CM623

Size	PR	Tread Depth (mm)	Standard Rim
9.00-16	14	15.0	6.50H



EDT

Size	PR	Tread Depth (mm)	Standard Rim
5.00-8	10	17.5	3.50D
6.00-9	12	19.3	4.00E
6.50-10	12	23.8	5.00F
7.00-12	14	22.0	5.00S
7.00-15	14	23.0	5.5
7.50-15	14	21.5	6.0
8.25-15	14	24.5	6.5
28×9-15/815-15	14	20.6	7.0
28×12-15	24	19.0	9.75BD
32×12-15	24	25.5	9.75BD

Sizes may be limited by market.

2009 TIRE MANUAL



OFF THE ROAD TYRES

CB716

Size	PR	Type	Tread Depth (mm)	Standard Rim
13.00-24	12	TT	24.5	10.0
15.5-25	12	TT	24.5	12.00/1.3
15.5-25	16	TT	24.5	12.00/1.3

CB750

Size	PR	Type	Tread Depth (mm)	Standard Rim
16/70-20	10	TT	35.0	13

C-3

Size	PR	Type	Tread Depth (mm)	Standard Rim
18.00-24	12	TT	35.0	13.00/2.5



C-7

Size	PR	Type	Tread Depth (mm)	Standard Rim
23.1-26	12	TT/TL	17.0	DW20



CL710

Size	PR	Type	Tread Depth (mm)	Standard Rim
12.00-24	20	TT	35.0	8.5



CL728

Size	PR	Type	Tread Depth (mm)	Standard Rim
23.5-25	16	TT/TL	33.0	19.5/2.5
23.5-25	20	TT/TL	33.0	19.5/2.5

Sizes may be limited by market.



CL729

Size	PR	Type	Tread Depth (mm)	Standard Rim
20.5-25	16	TT/TL	31.0	17.00/2.0
20.5-25	20	TT/TL	31.0	17.00/2.0
17.5-25	12	TL	26.0	14.00/1.5



CL735

Size	PR	Type	Tread Depth (mm)	Standard Rim
14.00-24	24	TT	42.0	10.00
18.00-25	32	TT/TL	38.0	13.00/2.5



CS726

Size	PR	Type	Tread Depth (mm)	Standard Rim
11.00-20	16	TT		8.00



CS730

Size	PR	Type	Tread Depth (mm)	Standard Rim
14.00-24	28	TT/TL		10.0
14.00-24	24	TT/TL		10.0

Sizes may be limited by market.



G2/L2

Size	PR	Type	Tread Depth (mm)	Standard Rim
13.00-24TG	12	TT/TL	25.5	8.00TG
13.00-24TG	16	TT/TL	25.5	8.00TG
14.00-24TG	12	TT/TL	25.5	8.00TG
14.00-24TG	16	TT/TL	25.5	8.00TG



R-4

Size	PR	Type	Tread Depth (mm)	Standard Rim
17.5L-24	12	TL	25.5	W15L
19.5L-24	12	TL	27.0	DW16A
21L-24	12	TL	27.5	DW18A



E3/L3

Size	PR	Type	Tread Depth (mm)	Standard Rim
14.00-24	16	TT/TL	25.5	10.0
14.00-24	24	TT/TL	25.5	10.0
15.5-25	12	TT/TL	24.5	12.00/1.3
16.00-25	32	TT	29.0	11.25/2.0
16.00-25	28	TT/TL	29.0	11.25/2.0
17.5-25	12	TT/TL	25.0	14.00/1.5
17.5-25	16	TT/TL	25.0	14.00/1.5
18.00-25	32	TT/TL	31.5	13.00/2.5
18.00-25	40	TT/TL	31.5	13.00/2.5
26.5-25	20	TT/TL	36.0	22.0/3.0
26.5-25	28	TT/TL	39.0	22.0/3.0

2009 TIRE MANUAL



SKIDSTEER TYRES

Sizes may be limited by market.



CL624

Size	PR	Type	Tread Depth (mm)	Standard Rim
23×8.5-12	6	TL	13.2	7.0-1-70
27×8.5-15	6	TL	12.7	75A-15



CL718

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS	8	TL	15.0	8.25
10-16.5NHS	10	TL	15.0	8.25



CL719

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS(Reinforced)	8	TL	16.0	8.25
12-16.5NHS(Reinforced)	10	TL	18.0	9.75



CL720

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS(Reinforced)	12	TL	21.0	8.25



CL721

Size	PR	Type	Tread Depth (mm)	Standard Rim
12-16.5NHS(Reinforced)	14	TL	28.5	9.75



CL722

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS	10	TL	13.5	8.25
12-16.5NHS	12	TL	17.5	9.75

Sizes may be limited by market.

Sizes may be limited by market.



CL723

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS	10	TL	18.0	8.25
12-16.5NHS	12	TL	20.0	9.75



K192

Size	PR	Type	Tread Depth (mm)	Standard Rim
10-16.5NHS(Reinforced)	8	TL	16.5	8.25
10-16.5NHS(Reinforced)	10	TL	16.5	8.25
12-16.5NHS(Reinforced)	10	TL	18.0	9.75
12-16.5NHS(Reinforced)	12	TL	18.0	9.75

Sizes may be limited by market.

2009 TIRE MANUAL



SOLID TYRES



CL401(S)

Size	Tread Depth (mm)	Standard Rim	Click
6.00-9	15	4.00E	
6.50-10	16	5.00F	
7.00-12	15	5.00S	
28×9-15	16	7.0	



CL402(S)

Size	Tread Depth (mm)	Standard Rim	Click
5.00-8	25	3.00D	click
		3.25I	
		3.75	
6.00-9	25	4.00E	click
6.50-10	25	5.00F	click
		5.50F	
7.00-12	25	5.00S	click
7.00-15	25	5.50S	click
		6.0	
		6.5	click
8.25-15	30	6.5	
	30	5.5	
28×9-15 (8.15-15)	25	6.5	
		7.0	

Sizes may be limited by market.



CL403(S)

Size	Tread Depth (mm)	Standard Rim	Click
4.00-8	20	3.00D	click
		3.75	click
5.00-8	25	3.00D	click
		3.00D	click
15×4 1/2-8 (125/75-8)	20	3.25I	click
		4.33R	click
16×6-8 (150/75-8)	20	4.33R	click
18×7-8 (180/70-8)	25	4.33R	click
6.00-9	25	4.00E	click
7.00-9	30	5.00S	
21×8-9 (200/75-9)	25	6.00E	click
23×9-10 (225/75-10)	25	6.50F	click
200/50-10	20	6.50F	click
6.50-10	25	5.00F	click
7.00-12	30	5.00S	click
8.25-12	35	5.00S	
23×10-12 (250/60-12)	25	8.00G	click
27×10-12 (250/75-12)	30	8.00G	click
28×9-15 (8.15-15) (225/75-15)	25	7.0	click
28×12.5-15 (315/50-15)	30	9.75	click
32×12.1-15(355/65-15)(350-15)	30	9.75	click
250-15 (250/70-15)	30	7.0	click
		7.5	click
300-15 (315/70-15)	30	8.0	click
		5.5	
7.50-15(30)	30	6.5	
		5.5	
8.25-15	35	6.5	
		5.5	
7.50-16	30	6.0	
		5.5	
8.00-16	30	6.5	
		7.0	
8.25-20	45	6.5	
		7.0	
9.00-20、10.00-20	45	8.0	
		7.5	
		8.0	
11.00-20	45	8.0	
		8.0	
12.00-20	45	8.5	
		10.00W	
14.00-20	45		

Sizes may be limited by market.



CL404(S)

Size	Tread Depth (mm)	Standard Rim	Click
9.00-16	25	6.50H	
		7.00N	
		7.0	
10.00-20	25	7.5	
		8.0	
		8.0	
12.00-20	25	8.5	
12.00-24	30	8.5	



GHT01(S)

Size	Tread Depth (mm)	Standard Rim	Click
3.50-5	13	3.0	
5.00-8	18	3.00D	click
6.00-9	18	4.00E	click
7.00-9	20	5.00S	
6.50-10	18	5.00F	click
7.00-12	18	5.00S	click
8.25-12	25	5.00S	
5.50-15	22	4.50E	
16×6-8 (150/75-8)	15	4.33R	click
18×7-8	18	4.33R	click
21×8-9 (200/75-9)	18	6.00E	click
23×9-10 (225/75-10)	25	6.50F	click
28×9-15(8.15-15) (225/75-15)	20	6.5	
		7.0	
7.00-15	25	5.50S	
		6.0	
		5.5	
8.25-15	25	6.5	
		8.0	click
300-15 (315/70-15)	25	6.5	
8.25-20	30	7.0	
		6.5	
9.00-20	30	7.0	

Sizes may be limited by market.



RIB01(S)

Size	Tread Depth (mm)	Standard Rim	Click
3.20-8	2	3.0	
15×4 1/2-8	4	3.00D	click
		3.25I	click
4.00-8	4	3.00D	click
		3.75	click



SM

Size	Tread Depth (mm)	Standard Rim	Click
10.00-20		7.5	



GHT01H

Size	Tread Depth (mm)	Standard Rim	Click
6.00-9	18	4.00E	
6.50-10	18	5.00F	
7.00-12	18	5.00S	
28×9-15 (8.15-15) (225/75-15)	20	6.5	
		7.0	
7.00-15	25	5.50S	
		6.0	
8.25-15	25	5.5	
		6.5	
250-15 (250/70-15)	20	7.0	
		7.5	
300-15 (315/70-15)	25	8.0	

Sizes may be limited by market.



PRESSED-ON SOLID TIRES

Tire Size		Overall Diameter	Section Width	Pattern type	Max. Load at Various Highest Speeds (kg)					Weight (kg)		Volumn
					Counter-balanced Lift Truck		Other Vehicles					
					10km/h	16km/h	16km/h					
(inch)	(mm)	(mm)	(mm)		Drive	Steer	Drive	Steer		Black	Non-Marking	(m³)
9×5×5	229×127×127	229	127	SM	890	790	850	785	680	6.2	6.4	0.007
10×4 3/4×6 1/2	254×120×165.1	254	120	SM	950	780	845	710	680	6.7	7	0.008
10×5×6 1/2	254×127×165.1	254	127	SM	940	840	900	830	725	7	7.2	0.008
10×5×6 1/2	254×127×165.1	254	127	TR	940	840	900	830	725	6.9	7.5	0.008
10 1/2×5×6 1/2	267×127×165.1	267	127	SM	1000	890	950	880	770	7.8	8	0.009
12×4×8	305×102×203.2	305	102	SM	905	745	810	680	645	7.4	7.6	0.009
12×4 1/2×8	305×114×203.2	305	114	SM	970	860	930	860	745	8.4	8.8	0.011
12×5 1/2×8	305×140×203.2	305	140	SM	1340	1100	1195	1005	955	10.3	10.8	0.013
13 1/2×5 1/2×8	343×140×203.2	343	140	SM	1400	1250	1340	1240	1080	13.4	14.1	0.016
13 1/2×5 1/2×8	343×140×203.2	343	140	TR	1400	1250	1340	1240	1080	12.3	12.6	0.016
14×4 1/2×8	356×114×203.2	356	114	SM	1090	970	1040	960	840	11.2	11.6	0.014
14×4 1/2×8	356×114×203.2	356	114	TR	1090	970	1040	960	840	10.7	11.2	0.014
14×5×10	356×127×254	356	127	SM	1335	1100	1195	1000	955	11.5	11.9	0.016
15×4×11 1/4	381×102×285.8	381	102	SM	980	880	940	870	750	10.2	10.5	0.015
15×5×11 1/4	381×127×285.8	381	127	SM	1290	1150	1230	1140	990	12.1	12.8	0.018
16×5×10 1/2	406×127×266.7	406	127	SM	1400	1250	1340	1240	1080	14.5	15.2	0.021
16×5×10 1/2	406×127×266.7	406	127	TR	1400	1250	1340	1240	1080	14.3	14.7	0.021
16×6×10 1/2	406×152×266.7	406	152	SM	1780	1580	1700	1570	1370	17.6	18.3	0.025
16×6×10 1/2	406×152×266.7	406	152	TR	1780	1580	1700	1570	1370	17.1	17.7	0.025
16×7×10 1/2	406×178×266.7	406	178	SM	2150	1910	2060	1910	1660	20.8	21.4	0.029
16 1/4×5×11 1/4	413×127×285.8	413	127	SM	1415	1260	1350	1250	1090	14.5	15.1	0.022
16 1/4×5×11 1/4	413×127×285.8	413	127	TR	1415	1260	1350	1250	1090	14.1	14.5	0.022
16 1/4×6×11 1/4	413×152×285.8	413	152	SM	1780	1580	1710	1580	1370	17.5	18.1	0.026
16 1/4×6×11 1/4	413×152×285.8	413	152	TR	1780	1580	1710	1580	1370	16.9	17.4	0.026
16 1/4×7×11 1/4	413×178×285.8	413	178	SM	2150	1910	2050	1900	1650	20.8	21.4	0.030
16 1/4×7×11 1/4	413×178×285.8	413	178	TR	2150	1910	2050	1900	1650	20	20.6	0.030
17×5×12 1/8	432×127×308	432	127	SM	1460	1300	1390	1290	1125	15.3	15.7	0.024
18×5×12 1/8	457×127×308	457	127	SM	1530	1360	1460	1350	1170	17.5	18.2	0.027
18×5×12 1/8	457×127×308	457	127	TR	1530	1360	1460	1350	1170	16.8	17.5	0.027
18×6×12 1/8	457×152×308	457	152	SM	1950	1740	1860	1720	1500	21.2	22.1	0.032
18×6×12 1/8	457×152×308	457	152	TR	1950	1740	1860	1720	1500	20.3	21.0	0.032
18×7×12 1/8	457×178×308	457	178	SM	2370	2110	2270	2100	1820	24.4	25.2	0.037
18×7×12 1/8	457×178×308	457	178	TR	2370	2110	2270	2100	1820	23.9	24.9	0.037
18×8×12 1/8	457×203×308	457	203	SM	2790	2480	2670	2470	2150	28.3	29.0	0.042
18×8×12 1/8	457×203×308	457	203	TR	2790	2480	2670	2470	2150	26.9	28.3	0.042
18×9×12 1/8	457×229×308	457	229	TR	3215	2860	3070	2840	2470	34	35	0.048
20×5×16	508×127×406.4	508	127	SM	1740	1430	1560	1310	1250	17.9	18.5	0.033
20×8×16	508×203×406.4	508	203	SM	2790	2480	2670	2470	2150	28.8	29.4	0.052
20×8×16	508×203×406.4	508	203	TR	2790	2480	2670	2470	2150	27.6	28.5	0.052
21×6×15	533×152×381	533	152	SM	2350	1930	2100	1765	1680	25.7	26.6	0.043
21×6×15	533×152×381	533	152	TR	2350	1930	2100	1765	1680	25.3	26.1	0.043
21×7×15	533×178×381	533	178	SM	2670	2380	2550	2360	2050	30.0	31.1	0.051
21×7×15	533×178×381	533	178	TR	2670	2380	2550	2360	2050	29.3	30.0	0.051
21×8×15	533×203×381	533	203	SM	3140	2795	3000	2780	2420	34.5	35.7	0.058
21×8×15	533×203×381	533	203	TR	3140	2795	3000	2780	2420	33.0	34	0.058
21×9×15	533×229×381	533	229	SM	3620	3220	3460	3200	2790	39.4	40.3	0.065
22×8×16	559×203×406.4	559	203	SM	3260	2900	3110	2880	2505	36.8	37.9	0.063
22×8×16	559×203×406.4	559	203	TR	3260	2900	3110	2880	2505	35	36	0.063
22×9×16	559×229×406.4	559	229	SM	3750	3340	3590	3320	2890	45.1	46.6	0.072
22×9×16	559×229×406.4	559	229	TR	3750	3340	3590	3320	2890	42.9	44.1	0.072
22×10×16	559×254×406.4	559	254	SM	4250	3780	4060	3760	3270	51		0.079
22×12×16	559×305×406.4	559	305	SM	5235	4660	5000	4630	4030	61.3	63.2	0.095
22×12×16	559×305×406.4	559	305	TR	5235	4660	5000	4630	4030	60.3	62	0.095
22×14×16	559×355×406.4	559	355	SM	6230	5545	5950	5510	4795	73		0.111
28×12×22	711×305×558.8	711	305	SM	6270	5580	5990	5550	4825	81.4	83.5	0.154
	660×203×480	660	203	SM	3695	3025	3215	2640	2400	54.5		0.088

Sizes may be limited by market.

2009 TIRE MANUAL

SUMMARY OF TECHNICAL PARAMETERS

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
7.00R16	CR926	14	11.0	5.50F	118/114L	200	775	1320	1180	770	770
	CM998	14	15.5		118/114L	200	775	1320	1180	770	770
7.50R16	CB999	8	15.0	6.00G	112/110N	215	815	1120	1060	450	450
		10	15.0		116/114N	215	815	1250	1180	525	525
		14	15.0		122/118L	215	815	1500	1320	770	770
	CR926	14	12.0		122/118L	215	805	1500	1320	770	770
	CR960A	14	12.0		122/118L	215	805	1500	1320	770	770
	CM998	14	16.0		122/118L	215	805	1500	1320	770	770
8.25R15	CM958	18	14.0	6.5	143/141J	236	847	2725	2575	850	850
8.25R16	CR926	14	14.0	6.50H	126/122L	235	855	1800	1700	670	670
		16	14.0		128/124L	255	900	2150	1850	770	770
	CR960A	14	13.0		128/126L	235	855	1800	1700	670	670
	CB981	14	16.5		128/126L	235	805	1800	1700	670	670
	CB995	14	16.5		128/126L	235	865	1800	1700	670	670
	CM998	14	16.5		128/126L	235	865	1800	1700	670	670
9.00R16	CR926	14	15.0	6.50H	131/126L	255	900	1950	1700	670	670
	CM987	16	15.0		134/129L	255	900	2120	1850	770	770
7.50R20	CR926	14	14.0	6.0	130/128L	215	935	1900	1800	830	830
	CR975	14	14.0		130/128L	215	935	1900	1800	830	830
8.25R20	CR926	14	15.0	6.5	136/134K	232	971	2240	2120	830	830
	CR975	14	15.0		136/134K	232	971	2240	2120	830	830
	CM998	14+	16.5		136/134K	232	971	2240	2120	830	830
	CR960E	16	17.0		139/137K	232	971	2430	2300	930	930
9.00R20	CR926	14	15.5	7.0	141/139K	259	1018	2575	2430	790	790
		16	15.5		144/142K	259	1019	2800	2650	900	900
	CR926A	14	15.5		141/139K	259	1018	2575	2430	790	790
		16	15.5		144/142K	259	1019	2800	2650	900	900
	CB972	16	22.0		144/142F	259	1019	2800	2650	900	900
	CB981	16	18.0		144/142K	259	1019	2800	2650	900	900
	CR976A	14	14.5		141/139K	259	1018	2575	2430	790	790
		16	14.5		144/142K	259	1019	2800	2650	900	900
	CM913	14	20.0		141/139K	259	1018	2575	2430	790	790
		16	20.0		144/142K	259	1019	2800	2650	900	900
	CM922	16	15.0		144/142K	259	1019	2800	2650	900	900
	CM987	16	16.0		144/142K	259	1019	2800	2650	900	900
	CM987E	16	20.0		144/142K	259	1019	2800	2650	900	900
	CM993	16	17.0		144/142K	259	1019	2800	2650	900	900
	CM998	16	17.0		144/142K	259	1019	2800	2650	900	900

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
	CR926	16	16.0		146/143K	278	1055	3000	2725	830	830
		18	16.0		149/146J	278	1055	3250	3000	930	930
	CB945	16	15.0		146/143K	278	1055	3000	2630	840	770
		18	15.0		149/146J	278	1055	3250	3000	930	930
	CB972	16	24.0		146/143C.F	278	1065	3000	2725	830	830
		18	24.0		149/146C.F	278	1065	3250	3000	930	930
	CB981	16	19.5		146/143K	278	1055	3000	2725	830	830
		18	19.5		149/146J	278	1055	3250	3000	930	930
	CB995	16	18.0		146/143K	278	1054	3000	2725	830	830
		18	18.0		149/146J	278	1054	3250	3000	930	930
	CR944	16	15.0		146/143K	278	1055	3000	2725	830	830
		16	19.0		146/143K	278	1054	3000	2725	830	830
	CR963	16	17.0		146/143K	278	1055	3000	2725	830	830
		16	15.0		146/143K	278	1055	3000	2725	830	830
	CR976A	16	15.0		149/146J	278	1055	3250	3000	930	930
		18	15.0		149/146L	278	1054	3250	3000	930	930
	CM910	18	20.0		146/143K	278	1054	3000	2725	830	830
		18	20.0		149/146L	278	1054	3250	3000	930	930
	CM913	16	20.0		146/143K	278	1054	3000	2725	830	830
		18	20.0		149/146L	278	1054	3250	3000	930	930
10.00R20	CM922	16	15.5	7.5	146/143K	278	1054	3000	2725	830	830
		16	20.0		146/143K	278	1054	3000	2725	830	830
	CM930	18	20.0		149/146J	278	1054	3250	3000	930	930
		18	20.0		146/143K	278	1054	3000	2725	830	830
	CM938	16	15.0		146/143K	278	1054	3000	2725	830	830
		16	16.0		146/143K	278	1055	3000	2725	830	830
	CM954	18	16.0		149/146J	278	1055	3250	3000	930	930
		16	15.5		146/143K	278	1055	3000	2725	830	830
	CM958	18	15.5		149/146J	278	1054	3250	3000	930	930
		16	19.0		146/143K	278	1055	3000	2725	830	830
	CM985	18	19.0		149/146J	278	1055	3250	3000	930	930
		16	17.0		146/143K	278	1055	3000	2725	830	830
	CM987	18	17.0		149/146J	278	1055	3250	3000	930	930
		18	20.0		146/143K	278	1055	3000	2725	830	830
	CM987E	16	15.5		149/146J	278	1055	3250	3000	930	930
		18	15.5		146/143K	278	1055	3000	2725	830	830
	CM993	16	18.0		146/143K	278	1055	3000	2725	830	830
		18	18.0		149/146J	278	1055	3250	3000	930	930
	CM998	16	18.0		146/143K	278	1054	3000	2725	830	830
		18	18.0		149/146J	278	1054	3250	3000	930	930

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
11.00R20	CR926	16	16.0	8.0	150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CR926E	18	19.5		152/149K	293	1085	3550	3250	930	930
	CB972	18	24.5		152/149C.F	293	1096	3550	3250	930	930
	CB981	16	20.5		150/147K	293	1085	3350	3075	830	830
		18	20.5		152/149K	293	1085	3550	3250	930	930
	CB995	16	19.0		150/147K	293	1085	3350	3075	830	830
		18	19.0		152/149J	293	1085	3550	3250	930	930
	CR944	16	15.0		150/147K	293	1085	3350	3075	830	830
		18	15.0		152/149K	293	1085	3550	3250	930	930
	CR976A	16	15.5		150/147K	293	1085	3350	3075	830	830
		18	15.5		152/149K	293	1085	3550	3250	930	930
	CM913	16	20.5		150/147K	293	1085	3350	3075	830	830
		18	20.5		152/149K	293	1085	3550	3250	930	930
	CM922	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM925	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM938	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM954	16	15.0		150/147K	293	1085	3350	3075	830	830
		18	15.0		152/149K	293	1085	3550	3250	930	930
	CM957	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM958	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM961	16	20.0		150/147K	293	1085	3350	3075	830	830
		18	20.0		152/149K	293	1085	3550	3250	930	930
	CM987	16	18.0		150/147K	293	1085	3350	3075	830	830
		18	18.0		152/149K	293	1085	3550	3250	930	930
	CM987E	18	20.0		152/149K	293	1085	3550	3250	930	930
	CM988	16	16.0		150/147K	293	1085	3350	3075	830	830
		18	16.0		152/149K	293	1085	3550	3250	930	930
	CM993	16	19.0		150/147K	293	1085	3350	3075	830	830
		18	19.0		152/149K	293	1085	3550	3250	930	930
	CM997	16	20.6		150/147K	293	1085	3350	3075	830	830
		18	20.6		152/149K	293	1085	3550	3250	930	930
	CM998	16	19.0		150/147K	293	1085	3350	3075	830	830
		18	19.0		152/149J	293	1085	3550	3250	930	930
12.00R20	CR926	18	17.5	8.5	154/151K	315	1125	3750	3450	830	830
	CR926E	18	20.5		154/149J	315	1125	3750	3450	830	830
	CB972	18	25.5		154/151F	315	1136	3750	3450	830	830
	CB981	18	20.5		154/151K	315	1125	3750	3450	830	830
	CB995	18	20.0		154/151K	315	1125	3750	3450	830	830
	CR964	18	17.5		154/151K	315	1125	3750	3450	830	830
	CR976A	18	17.0		154/151K	315	1125	3750	3450	830	830
	CM913	18	22.0		154/151K	315	1125	3750	3450	830	830
	CM922	18	17.0		154/151K	315	1125	3750	3450	830	830
	CM925	18	17.0		154/151K	315	1125	3750	3450	830	830
	CM938	18	17.0		154/151K	315	1125	3750	3450	830	830
	CM957	18	17.0		154/151K	315	1125	3750	3450	830	830
	CR926	16	17.5		154/151K	315	1125	3750	3450	830	830
		18	17.5		154/151K	315	1125	3750	3450	830	830
	CR926E	16	20.5		154/151K	315	1125	3750	3450	830	830
		18	20.5		154/151K	315	1125	3750	3450	830	830

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
12.00R20	CM958	18	17.0	8.5	154/151K	315	1125	3750	3450	830	830
	CM961	18	21.0		154/151K	315	1125	3750	3450	830	830
	CM987	18	19.0		154/151K	315	1125	3750	3450	830	830
	CM993	18	20.0		154/151K	315	1125	3750	3450	830	830
	CM998	18	20.5		154/151K	315	1125	3750	3450	830	830
	CM998	18	20.5		154/151K	315	1125	3750	3450	830	830
12.00R24	CB972	18	25.0	8.5	158/155F	313	1225	4250	3875	830	830
	CM912	20	19.0		160/157J	313	1225	4500	4125	900	900
	CR926B	18	19.0		158/155K	313	1225	4250	3875	830	830
		20	19.0		160/157K	313	1225	4500	4125	900	900
14.00R20	CB999	18	19.5	10.0	161/158J	375	1240	4625	4250	690	690
8R22.5	CR950	12	13.0	6.00	128/127M	203	935	1800	1750	675	675
		14	13.0		130/128M	203	935	1900	1800	830	830
	CR970	12	13.0		128/127M	203	935	1800	1750	675	675
		14	13.0		130/128M	203	935	1900	1800	830	830
9R22.5	CR950	12	14.0	6.75	133/131M	229	974	2060	1950	720	720
		14	14.0		136/134M	229	974	2240	2120	830	830
	CR970	12	13.0		133/131M	229	974	2060	1950	720	720
		14	13.0		136/134M	229	974	2240	2120	830	830
10R22.5	CR950	14	15.0	7.50	141/139M	254	1018	2575	2430	790	790
		16	15.0		144/142M	254	1018	2800	2650	850	850
	CR970	14	14.3		141/139M	254	1019	2575	2430	790	790
		16	14.3		144/142M	254	1018	2800	2650	850	850
11R22.5	CR915	14	11.0	8.25	144/142M	279	1054	2800	2650	720	720
	CR960	14	14.2		144/142L	279	1054	2800	2650	720	720
		16	14.2		146/143L	279	1054	3000	2725	830	830
	CR960E	16	22.0		148/145J	279	1065	3150	2900	850	850
	CR976A	14	15.5		144/142M	279	1054	2800	2650	720	720
		16	15.5		146/143L	279	1054	3000	2725	830	830
	CR966	16	15.0		146/143L	279	1054	3000	2725	830	830
	CM980 (CM965)	14	20.6		144/142M	279	1065	2800	2650	720	720
		16	20.6		148/145L	279	1065	3150	2900	850	850
	CM982	14	20.6		144/142M	279	1065	2800	2650	720	720
		16	20.6		148/145L	279	1065	3150	2900	850	850
	CM983	14	20.6		144/142M	279	1065	2800	2650	720	720
		16	20.6		148/145L	279	1065	3150	2900	850	850
	CM958	16	17.5		148/145L	279	1054	3150	2900	850	850
	CR989	14	14.2		144/142L	279	1054	2800	2650	720	720
		16	14.2		148/145M	279	1054	3150	2900	850	850
	CM993	14	20.6		144/142M	279	1065	2800	2650	720	720
		16	20.6		148/145L	279	1065	3150	2900	850	850
	CR926D	14	16.8		144/142M	279	1054	2800	2650	720	720
		16	16.8		148/145M	279	1054	3150	2900	850	850
	CR944	14	15.0		143/139L	279	1054	2740	2405	740	670
		16	15.0		146/142L	279	1054	3000	2630	840	770
	CM954	14	16.0		143/139L	279	1054	2740	2405	740	670

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
11R24.5	CR960	14	14.2	8.25	146/143L	279	1104	3000	2725	720	720
		16	14.2		149/146L	279	1104	3250	3000	830	830
	CR989	14	14.2		146/143L	279	1104	3000	2725	720	720
		16	14.2		149/146L	279	1104	3250	3000	830	830
	CM973	14	15.0		146/143L	279	1104	3000	2725	720	720
		16	15.0		149/146L	279	1104	3250	3000	830	830
	CM980 (CM965)	14	20.6		146/143L	279	1116	3000	2725	720	720
		16	20.6		149/146L	279	1116	3250	3000	830	830
	CM982	14	20.6		146/143L	279	1116	3000	2725	720	720
		16	20.6		149/146L	279	1116	3250	3000	830	830
	CM983	14	20.6		146/143L	279	1116	3000	2725	720	720
		16	20.6		149/146L	279	1116	3250	3000	830	830
12R22.5	CB972	16	24.5	9.00	150/147F	300	1085	3350	3075	830	830
		16	15.5		150/147L	300	1085	3350	3075	830	830
	CR976A	18	15.5		152/149L	300	1085	3550	3250	930	930
		16	18.0		150/147L	300	1085	3350	3075	830	830
	CM958	18	18.0		152/149L	300	1085	3550	3250	930	930
		18	21.0		152/149L	300	1085	3550	3250	930	930
	CM961	18	21.0		150/147L	300	1096	3350	3075	830	830
		16	22.0		152/149L	300	1096	3550	3250	930	930
	CM985	18	22.0		150/147L	300	1096	3350	3075	830	830
		18	22.0		152/149L	300	1096	3550	3250	930	930
13R22.5	CM923	16	20.0	9.75	152/149L	320	1124	3550	3250	760	760
		18	20.0		154/151K	320	1124	3750	3450	830	830
8.5R17.5	CR859	12	12.0	6.00	121/120L	215	802	1450	1400	650	650
9.5R17.5	CR859	14	13.0	6.75	129/127L	240	842	1850	1750	750	750
205/75R17.5	CR960A		12.0	6.00	122/120M	204	753	1500	1400	675	675
			12.0		124/122M	204	753	1600	1500	750	750
	CM986		14.0		122/120M	204	753	1500	1400	675	675
			14.0		124/122M	204	753	1600	1500	750	750
215/75R17.5	CR960A	14	12.5	6.00	126/124M	211	767	1700	1600	700	700
		16	12.5		135/133J	211	767	2180	2060	850	850
	CM986	14	14.5		126/124M	211	767	1700	1600	700	700
		16	14.5		135/133J	211	767	2180	2060	850	850

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
225/75R17.5	CR960A		12.5	6.75	126/125M	226	783	1700	1650	675	675
			12.5		129/127M	226	783	1850	1750	725	725
	CM986		14.0		126/125M	226	783	1700	1650	675	675
			14.0		129/127M	226	783	1850	1750	725	725
235/75R17.5	CR960A	12	13.3	6.75	130/128M	233	797	1900	1800	725	725
		14	13.3		132/130M	233	797	2000	1900	775	775
			13.3		143/141J	233	797	2725	2575	875	875
	CM986	12	15.4		130/128M	233	797	1900	1800	725	725
		14	15.4		132/130M	233	797	2000	1900	775	775
			15.4		143/141J	233	797	2725	2575	875	875
	8R19.5	CR960A	12	6.00	124/122L	203	859	1600	1500	760	760
225/70R19.5	CR960A	12	13.0	6.75	125/123M	226	811	1650	1550	660	660
	CM986	12	15.0		125/123M	226	811	1650	1550	660	660
245/70R19.5	CR960A	14	13.0	7.50	133/131M	248	839	2060	1950	760	760
		16	13.0		136/134M	248	839	2240	2120	825	825
	CM986	14	15.4		133/131M	248	845	2060	1950	760	760
		16	15.4		136/134M	248	845	2240	2120	825	825
265/70R19.5	CR976A	14	14.0	7.50	137/134M	262	867	2300	2120	760	760
		16	14.0		140/138M	262	867	2500	2360	775	775
255/70R22.5	CR976A	16	14.5	7.50	140/137M	255	930	2500	2300	800	800
275/70R22.5	CR976A	16	14.0	8.25	148/145M	276	958	3150	2900	900	900
			14.0		152/148J	276	958	3550	3150	930	930
	CR960E	18	21.0		152/148J	276	964	3550	3150	930	930
	CR976	16	13.0		144/141K	276	958	2800	2575	830	830
275/80R22.5	CR976A	16	14.0	8.25	149/146M	276	1012	3250	3000	850	850
295/75R22.5	CR915	16	11.0	9.00	144/141M	298	1014	2800	2575	760	760
					144/141L	298	1014	2800	2575	760	760
	CR960	14	14.2		146/143L	298	1014	3000	2725	830	830
		16	14.2		144/141M	298	1020	2800	2575	760	760
	CM980 (CM965)	14	20.6		146/143M	298	1020	3000	2725	830	830
		16	20.6		144/141M	298	1020	2800	2575	760	760
	CM982	14	20.6		146/143M	298	1020	3000	2725	830	830
		16	20.6		144/141M	298	1020	2800	2575	760	760
	CM983	14	20.6		146/143M	298	1020	3000	2725	830	830
		16	20.6		144/141M	298	1020	2800	2575	760	760
	CR989	14	14.2		144/141L	298	1014	2800	2575	760	760
		16	14.2		146/143L	298	1014	3000	2725	830	830

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & Speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
295/80R22.5	CR960	16	15.0	9.00	150/147M	298	1044	3350	3075	830	830
		18	15.0		152/149M	298	1044	3550	3250	900	900
	CR960E	16	23.0		150/147J	298	1044	3350	3075	830	830
		18	23.0		152/149J	298	1044	3550	3250	900	900
	CR966	16	15.0		150/147M	298	1044	3350	3075	830	830
		16	15.0		150/147M	298	1044	3350	3075	830	830
	CR976A	16	15.0		152/149M	298	1044	3550	3150	900	900
		18	15.0		150/147M	298	1050	3350	3075	830	830
	CM982	16	20.6		152/149M	298	1050	3550	3250	900	900
		18	20.6		150/147M	298	1044	3350	3075	830	830
	CM993	16	20.6		152/149M	298	1044	3550	3250	900	900
		18	20.6		150/147L	298	1044	3350	3075	830	830
	CM997	16	20.6		152/149L	298	1044	3550	3250	900	900
		18	20.6		152/148M	312	1014	3550	3150	850	850
	CR960A	18	15.0	9.00	154/150L	312	1014	3750	3350	900	900
			15.0		152/148M	312	1020	3550	3150	850	850
315/70R22.5	CM985	18	20.5		154/150L	312	1020	3750	3350	900	900
			20.5		151/148M	312	1076	3450	3150	760	760
315/80R22.5	CR960	16	15.0	9.00	154/151M	312	1076	3750	3450	830	830
		18	15.0		156/151M	312	1076	4000	3450	850	850
			15.0		154/151M	312	1088	3750	3450	830	830
	CM958	18	18.0		156/151L	312	1088	4000	3450	850	850
			18.0		154/151L	312	1088	3750	3450	830	830
	CM961	18	22.0		151/148M	312	1088	3450	3150	760	760
		16	22.0		154/151L	312	1088	3750	3450	830	830
		18	22.0		156/151M	312	1088	4000	3450	850	850
	CM985	18	22.0		151/148M	312	1082	3450	3150	760	760
			22.0		154/151M	312	1082	3750	3450	830	830
			22.0		156/151M	312	1082	4000	3450	850	850
	CM993	16	20.6		151/148M	312	1076	3450	3150	760	760
		18	20.6		154/151M	312	1076	3750	3450	830	830
			20.6		156/151M	312	1076	4000	3450	850	850
	CR926B	16	16.5		154/151M	312	1088	3750	3450	830	830
		18	16.5		156/151L	312	1088	4000	3450	850	850
			16.5		151/148M	312	1076	3450	3150	760	760
	CR976A	18	18.0		154/151M	312	1076	3750	3450	830	830
			18.0		156/151M	312	1076	4000	3450	850	850
			18.0		151/148M	312	1082	3450	3150	760	760

Sizes may be limited by market.

ALL STEEL TRUCK AND
BUS RADIAL TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	Load Index & speed Rating	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	Single	Dual	Single	Dual
385/65R22.5	CR976A	18	15.5	11.75	160K+158L	389	1072	4500		900	
425/65R22.5	CR976A	20	15.0	13.00	165K	430	1124	5150		825	
445/65R22.5	CR976A	20	15.0	14.00	169K	454	1150	5800		900	
285/75R24.5	CR960	14	14.2	8.25	144/141L	283	1050	2800	2575	760	760
		16	14.2		147/144L	283	1050	3075	2800	830	830
	CM980 (CM965)	14	20.6		144/141L	283	1056	2800	2575	760	760
		16	20.6		147/144L	283	1056	3075	2800	830	830
	CM982	14	20.6		144/141L	283	1056	2800	2575	760	760
		16	20.6		147/144L	283	1056	3075	2800	830	830
	CM983	14	20.6		144/141L	283	1056	2800	2575	760	760
		16	20.6		147/144L	283	1056	3075	2800	830	830
	CB760	★ ★	28.5		177B	520	1490	7300		525	
		★	35.5		195A2	597	1617	12150		500	
20.5R25	CB760	★ ★	35.5	19.50/2.5	185B	597	1617	9250		525	
23.5R25		★	37.0	22.00/3.0	202A2	673	1750	15000		500	
26.5R25	CB761	★ ★	37.0		193B	673	1750	11500		525	
21.00R35	CB761	★ ★	44.0	15.00/3.0	201B	572	2004	14500		700	
16.00R25	CR766	★ ★	50.0	11.25/2.0	200A5	406	1510	14000		1000	

Sizes may be limited by market.

BIAS TRUCK TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
					Section Width	Overall Diameter	Single	Dual	Single	Dual
14.00-20	CL908	18	20.0	10.0	375	1240	4525	3970	670	600
		20	20.0		375	1240	5000	4375	770	700
	CL951	18	19.0		375	1240	4525	3970	670	600
13.00-20	CL951	18	19.0	9.0	340	1177	4205	3690	770	700
12.00-24	CR936	18	16.0	8.5	315	1225	4195	3680	810	740
	CL928	18	17.0		315	1225	4195	3680	810	740
	CL951	18	17.5		315	1225	4195	3680	810	740
	CL969	18	23.0		315	1225	4195	3680	810	740
		20	23.0		315	1225	4500	4000	880	810
	CM937	18	15.0		315	1225	4195	3680	810	740
	CM953	18	15.0		315	1225	4195	3680	810	740
12.00-20	CL969	18	23.0	8.5	315	1125	3730	3270	810	740
		20	23.0		315	1125	3730	3270	810	740
	CL977	18	17.0		315	1125	3730	3270	810	740
	CM937	18	15.0		315	1125	3730	3270	810	740
	CL959	18	18.0		315	1125	3730	3270	810	740
	CL946	18	18.0		315	1125	3730	3270	810	740
	CL909	18	23.0		315	1125	3730	3270	810	740
		20	23.0		315	1125	4000	3450	880	810
	CL928	18	17.0		315	1125	3730	3270	810	740
	CL939A	18	20.0		315	1125	3730	3270	810	740
	CL951	18	17.5		315	1125	3730	3270	810	740
	CL956	18	22.0		315	1145	3730	3270	810	740
	CR936	18	15.0		315	1125	3730	3270	810	740
	CR992	18	16.0		315	1125	3730	3270	810	740
	CL955	18	17.0		315	1125	3730	3270	810	740
	CL991	18	30.0		315	1145	3730	3270	810	740
11.00-22.5	CR918	12	10.3	8.25	279	1054	2500	2180	590	520
11.00-22	CR940	16	15.0	8.0	293	1135	3480	3055	810	740

Sizes may be limited by market.

BIAS TRUCK TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
					Section Width	Overall Diameter	Single	Dual	Single	Dual
11.00-20	CM920	18	19.5	8.0	293	1085	3650	3150	910	840
	CL962	16	22.0		293	1105	3270	2870	810	740
		18	22.0		293	1105	3650	3150	910	840
	CL955	18	17.0		293	1085	3650	3150	910	840
	CL991	16	30.0		293	1105	3270	2870	810	740
		18	30.0		293	1105	3650	3150	910	840
	CL969	18	23.0		293	1105	3650	3150	910	840
		20	23.0		293	1105	3875	3350	1010	940
	CL977	16	17.0		293	1085	3270	2870	810	740
		18	17.0		293	1085	3650	3150	910	840
	CL956	16	22.0		293	1105	3270	2870	810	740
		18	22.0		293	1105	3650	3150	910	840
	CL928	16	17.0		293	1085	3270	2870	810	740
		18	17.0		293	1085	3650	3150	910	840
	CL909	18	22.0		293	1085	3650	3150	910	840
	CR992	18	16.0		293	1085	3650	3150	910	840
	CR990	18	15.5		293	1085	3650	3150	910	840
	CR952	16	19.0		293	1105	3270	2870	810	740
		18	19.0		293	1105	3650	3150	910	840
	CR948	16	15.0		293	1085	3270	2870	810	740
		18	15.0		293	1085	3650	3150	910	840
	CR936	16	15.0		293	1085	3270	2870	810	740
		18	15.0		293	1085	3650	3150	910	840
	CL939	18	20.0		293	1085	3650	3150	910	840
	CL939A	18	20.0		293	1085	3650	3150	910	840
	CL939B	18	20.0		293	1085	3650	3150	910	840
	CL946	16	17.0		293	1085	3270	2870	810	740
		18	17.0		293	1085	3650	3150	910	840
	CL951	18	17.0		293	1085	3650	3150	910	840
	CL959	18	17.0		293	1085	3650	3150	910	840

Sizes may be limited by market.

BIAS TRUCK TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
					Section Width	Overall Diameter	Single	Dual	Single	Dual
10.00-20	CL991	16	28.0	7.5	278	1073	3000	2630	810	740
		18	28.0		278	1073	3350	2900	910	840
	CL965	16	23.5		278	1073	3000	2630	810	740
		18	23.5		278	1073	3350	2900	910	840
	CL996	18	22.0		278	1073	3350	2900	910	840
	CL955	16	19.0		278	1055	3000	2630	810	740
	CL962	16	22.0		278	1073	3000	2630	810	740
	CM937	16	15.0		278	1055	3000	2630	810	740
	CL956	16	22.0		278	1073	3000	2630	810	740
	CL951	16	16.0		278	1055	3000	2630	810	740
	CL959	16	16.0		278	1055	3000	2630	810	740
	CL946	16	17.0		278	1055	3000	2630	810	740
		16	20.0		278	1055	3000	2630	810	740
		18	22.0		278	1073	3350	2900	910	840
	CL977	16	16.0		278	1055	3000	2630	810	740
	CR992H	16	19.0		278	1055	3000	2630	810	740
	CL939A	16	19.0		278	1055	3000	2630	810	740
	CL939B	16	19.0		278	1055	3000	2630	810	740
	CL939	16	19.0		278	1055	3000	2630	810	740
	CL935	16	22.0		278	1073	3000	2630	810	740
		18	22.0		278	1073	3350	2900	910	840
	CL928	16	15.0		278	1055	3000	2630	810	740
	CR952	16	19.0		278	1073	3000	2630	810	740
		18	19.0		278	1073	3350	2900	910	840
	CR949	16	16.0		278	1055	3000	2630	810	740
	CR948	16	14.0		278	1055	3000	2630	810	740
	CR992	16	16.0		278	1055	3000	2630	810	740
	CR943	16	17.0		278	1055	3000	2630	810	740
		18	17.0		278	1073	3350	2900	910	840
	CR942	16	15.0		278	1055	3000	2630	810	740
	K-78A	12	17.5		278	1054	2500	2180	590	520
	K-305A	12	21.0		278	1073	2500	2180	590	520
	K-72A	12	13.0		278	1054	2500	2180	590	520

Sizes may be limited by market.

BIAS TRUCK TYRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)	
					Section Width	Overall Diameter	Single	Dual	Single	Dual
9.00-20	CL977	16	15.5	7.0	259	1018	2900	2500	880	810
	CL959	16	16.0		259	1018	2900	2500	880	810
	CL928	14	14.5		259	1018	2575	2255	770	700
		16	14.5		259	1018	2900	2500	880	810
	CL939	16	18.0		259	1018	2900	2500	880	810
	CL939A	14	17.0		235	974	2205	1940	810	740
	CL939B	16	18.0		259	1018	2900	2500	880	810
	CL909	16	20.0		259	1018	2900	2500	880	810
		14	16.0		259	1018	2575	2255	770	700
	CL946	16	16.0		259	1018	2900	2500	880	810
		16	16.0		259	1018	2900	2500	880	810
	CL948	14	14.0		259	1018	2575	2255	770	700
		16	14.0		259	1018	2900	2500	880	810
	CR942	14	14.0		259	1018	2575	2255	770	700
		16	14.0		259	1018	2900	2500	880	810
	CR949	16	15.0		259	1018	2900	2500	880	810
	CR952	16	17.5		259	1038	2900	2500	880	810
	CR992	16	15.0		259	1018	2900	2500	880	810
	CL951	16	16.0		259	1018	2900	2500	880	810
	CL991	16	26.0		259	1038	2900	2500	880	810
	CL956	16	20.0		259	1038	2900	2500	880	810
8.25-20	CR942	14	14.0	6.5	235	974	2205	1940	810	740
		16	14.0		235	974	2430	2180	910	840
	CR992	14	16.5		235	974	2205	1940	810	740
	CL939A	14	17.0		235	974	2205	1940	810	740
	CL951	14	14.0		235	974	2205	1940	810	740
7.50-20	CR948	14	13.5	6.0	215	935	1885	1655	810	740
	CR990	14	12.5		215	935	1885	1655	810	740
	CR992	14	15.5		215	935	1885	1655	810	740
	CL951	14	14.0		215	935	1885	1655	810	740
7.00-20	CR948	14	13.0	5.5	200	904	1750	1550	840	770
	CL951	14	13.0		200	904	1750	1550	840	770

Sizes may be limited by market.

BIAS LIGHT TRUCK TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (kpa)
					Section Width	Overall Diameter	Single	Dual	
9.00-16	CL839A	14	16.0	6.50H	255	890	1955	1720	630
	CM847	14	13.5		255		1955	1720	630
8.25-16	CR890	14	12.0	6.50H	235	855	1705	1500	630
	CL891	16	19.0		235		1800	1600	730
	CL859	14	13.5		235		1705	1500	630
	CL865	16	16.0		235		1705	1500	730
	CL851	16	14.0		235		1800	1600	730
	CL839A	16	15.0		235		1800	1600	730
	CL827	14	14.0		235		1705	1500	630
	CR892	14	14.0		235		1705	1500	630
8-14.5TL	CR848	12	7.0	6.0	203	698	1285		690
		14	7.0		203		1365		790
7.50-16	CL856	14	18.0	6.00G	212	825	1500	1320	730
		16	18.0		212		1580	1390	760
	CL891	14	19.0		212		1580	1390	760
	CL851	14	12.5		215	805	1500	1320	730
	CL859	14	12.5		215		1500	1320	730
	CL827	12	13.0		215		1405	1240	630
		14	13.0		215		1500	1320	730
	CR826	12	12.0		215		1405	1240	630
		14	12.0		215		1500	1320	730
	CR832	12	10.0		215		1405	1240	630
		14	10.0		215		1500	1320	730
	CR885	16	16.0		215	815	1570	1380	770
	CR892	14	13.8		215	805	1500	1320	730
	CM828	8	12.0		215		1105	970	420
	CM847	14	13.0		215		1500	1320	730
	CL839A	14	15.0		215	815	1500	1320	730
	CR852	14	13.5		215		1500	1320	730
		16	13.5		215		1500	1320	730

Sizes may be limited by market.

BIAS LIGHT TRUCK TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (kpa)
					Section Width	Overall Diameter	Single	Dual	
7.50-15	CR852	12	10.5	6.00G	215	780	1370	1210	630
7.00-16	CL839A	14	14.0	5.50F	200	775	1320	1180	730
	CL951	14+	11.0		200		1320	1180	730
	CL827	10	12.0		200		1100	965	530
		12	12.0		200		1220	1075	630
		14	12.0		200		1320	1180	730
	CR892	12	12.5		200		1320	1180	630
		14	12.5		200		1220	1075	630
	CR881	12	10.5		200		1220	1075	630
		10	11.0		200		1100	965	530
	CR833	12	11.0		200		1220	1075	630
		14	11.0		200		1320	1180	730
		14+	11.0		200		1440	1270	840
	CR802	12	13.0		200		1220	1075	630
7.00-15	CL839	10	9.5	5.50F	200	750	1040	915	530
	CL951	12	11.0		200		1150	1030	630
	CR820	8	10.0		200		910	800	420
		10	10.0		200		1040	915	530
	CR832	10	10.0		200		1040	915	530
		12	10.0		200		1150	1030	630
	CR892	10	13.0		200		1040	915	530
6.50-16	CL859	12	10.0	5.50F	185	750	1060	925	630
	CL951	12+	10.0				1120	1010	630
	CL839A	12	12.5				1060	925	630
	CL851	12	10.0				1060	925	630
	CL830	12	8.0				1060	925	630
	CL827	8	10.0				855	755	420
		10	10.0				975	860	530
		12	10.0				1060	925	630
	CR802	12	10.0				1060	925	630
	CR832	8	9.0				855	755	420
		10	9.0				975	860	530
		12	9.0				1060	925	630
	CR852	12	10.5				1060	925	630
	CR881	10	10.0				975	860	530
		12	10.0				1060	925	630
	CR892	12	10.0				1060	925	630

Sizes may be limited by market.

BIAS LIGHT TRUCK TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)		Pressure (Kpa)
					Section Width	Overall Diameter	Single	Dual	
6.50-15	CR823	8	11.0	4.50E	180	730	820	720	420
		10	11.0				950	825	530
	CR832	10	8.5				950	825	530
	CR892	8+	10.7				820	720	420
6.00-16	CL827	8	10.0	4.50E	170	730	755	665	420
		10	10.0				860	755	530
6.50-14	CR820	8	10.0	41/2J	180	705	785	690	420
	CR845	10	10.5				890	790	530
	CR852	10	8.0/9.5				890	790	530
	CL827	10	11.0				785	690	420
	CR832	8	7.5/9.5				720	630	420
6.00-15	CM822	8	10.0	4.50E	170	705	720	630	420
	CL835	8	10.0				720	630	420
	CR832	10	8.0				825	730	530
6.00-14	CR831	6	8.0	41/2J	170	680	580	510	320
	CR820	8	10.0				685	600	420
	CL830	10	10.0				790	690	530
6.00-14	CR832	8	7.5	41/2J	170	680	685	600	420
Deep Groove 6.00-14	CR832	8	9.5	41/2J	170	680	685	600	420
6.00-13	CL830	10	8.0	41/2J	170	655	735	645	530
	CL951	10	10.0				735	645	530
	CR820	8	10.0				655	570	420
	CR881	8+	10.0				655	570	420
6.00-12	CR218	6	9.0	4.50B	156	574	360		210
5.60-13	CR225	4	6.5	4J	145	600	300		170
5.50-13	CR821	8	9.0		145	600	565	500	420
	CM834	10	8.0		160	620	630	555	530
5.00-12	CM834	10	8.0	3.50B	143	568	545	520	517
	CR820	8	9.0		154	568	485	465	400
	CR829	8	9.0		143	568	485	465	400
5.00-10	CR823	8	7.5	3.50B	143	517	430	410	400
4.50-12	CR831	8	8.0	3.00B	127	545	415	395	400
	CR820	6	8.0	3.00B	127	545	355	340	300
	CR224	4	7.0	2.50C	112	520	265	240	240

Sizes may be limited by market.

AGRICULTURAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)	Pressure (Kpa)
					Section Width	Overall Diameter		
6.00-12(17)	CB522	6	24.0	4.50E	165	640	405	250
6.00-12(20)	CB522	6	24.0	4.50E	165	640	405	250
6.00-12(17)	CB522	6	22.0	4.50E	165	640	405	390
6.00-12	CB527	6	22.0	4.50E	165	640	405	250
6.00-12(Reinforced)	CB527	6	24.0	4.50E	165	640	405	250
6.00-12(14)	CB527A	6	22.0	4.50E	165	640	405	250
23×10-10	CB528	4	28.0	8.00I	265	591	385	120
6.00-12	CB530	6	24.0	4.50E	165	640	405	205
8.3-20	CB535/R-1	4	30.0	W7	210	895	550	160
		6	30.0			895	695	240
	CB537/R-1	6	80.0			1050	970	270
	CB590/PR-1	6	70.0			950	970	270
		8	70.0			950	1145	360
8.3-24	CB538/R-1	6	30.0	W7	210	995	810	240
		8	30.0			995	950	300
	CB536/PR-1	6	80.0			1050	1135	270
		8	80.0			1050	1275	330
	CB537/R-1	6	80.0			1050	1135	270
		8	80.0			1050	1275	330
9.5-24	CB538/R-1	6	33.0	W8	240	1050	940	210
		8	33.0				1110	280
	CB536/PR-1	6	80.0				1315	240
		8	80.0				1475	290
11-28	CB536/PR-1	6	85.0	W10	305	1315	1000	160
11-32	CB535/R-1	6	36.0	W10	305	1360	1000	160
	CB538/R-1	6	36.0			1360		160
	CB536/PR-1	6	85.0			1490		140
	CB537/R-1	6	85.0			1360		140

Sizes may be limited by market.

AGRICULTURAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)	Pressure (Kpa)
					Section Width	Overall Diameter		
11.2-24	CB538/R-1	4	35.0	W10	285	1105	845	130
		6	35.0			1105	1045	180
	CB536/PR-1	8	63.0			1135	1225	247
	CB539/R-2	8	63.0			1135	1225	240
	CB590/PR-1	6	82.0			1205	1465	210
11.2-28	CB538/R-1	4	35.0	W10	285	1205	900	130
		6	35.0				980	180
		8	35.0				1005	110
12.4-24	CB538/R-1	6	36.0	W11	315	1160	1055	170
		8	36.0				1245	230
12.4/11-24	CB537/R-1	4	36.0	W11	315	1160	945	110
		6	36.0				1200	170
12.4/11-28	CB529	4	32.0	W11	315	1260	885	110
		6	32.0				1120	170
12.4-28	CB538/R-1	6	36.0	W11	315	1260	1120	170
		8	36.0				1330	230
12.4-38	CB538/R-1	4	36.0	W11	315	1514	1060	110
13.6-28	CB538/R-1	6	36.0	W12	345	1310	1260	160
		8	36.0			1310	1450	220
		10	36.0			1310	1680	250
13.6-38	CB538/R-1	6	36.0	W12	345	1565	1500	150
	CB537/R-1	8	95.0			1710	2675	130
14.9-24	CB538/R-1	8	38.0	W13	378	1265	1410	180
	CB538TL	4	38.0				1000	110
15-24	CB523	10	33.0	DW14	410	1330	2800	280
14.9-28	CB538/R-1	6	38.0	W13	378	1366	1450	180
	CB538/R-1	8	38.0				1675	220
14.9-30	CB538/R-1	10	38.0	W13	378	1415	2190	230
14.9-38	CB538/R-1	6	38.0	W13	378	1621	1700	140
		8	38.0				1850	140

Sizes may be limited by market.

AGRICULTURAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)	Pressure (Kpa)
					Section Width	Overall Diameter		
15.5-38	CB538/R-1	6	37.5	W14L	394	1569	1600	140
16.9-24	CB538/R-1	6	39.0	W15L	430	1335	1725	130
16.9-28	CB538/R-1	6	39.0	W15L	430	1435	1650	120
16.9-30	CB538/R-1	8	39.0	W15L	430	1485	2000	170
16.9-34	CB538/R-1	8	39.0	W15L	430	1585	2120	170
16.9-38	CB538/R-1	8	39.0	W15L	430	1690	1900	120
18.4-30	CB538/R-1	6	38.0	W16L	467	1550	1900	110
		8	38.0	DW16A		1552	2180	140
20.8-38	CB538/R-1	8	40.0	W18L	528	1835	3090	130
16.9/14-28	CB537/R-1	8	39.0	W15L	430	1435	1915	170
11.2-38	CB538TL	4	30.0	W10	284	1458	835	120
24.5-32	CB538TL	12	43.0	DW21A	620	1805	4000	170
30.5L-32	CB538TL	12	43.0	DW27A	775	1845	4250	140
10-15	CB539/R-2	8	9.0	9×15.3	276	855	1425	240
16/70-20	CB750	10	35.0	13	410	1075	4200	325
230/95-48	CB535TL	16	32.0	W7	229	1656	2000	320
6.50-20	CR534/F-2	4	17.5	5.00F	180	860	600	230
6.50-20	CR534/F-2	6	17.5	5.00F	180	860	615	310
	CR534/F-2	8	17.5	5.00F	180	860	865	420
7.50-16	CR534/F-2	6	17.5	5.00F	205	860	810	280
	CB527	8	24.0	5.50F	205	810	890	390
6.00-16	CL877	10	10.0	4.00E	158	710	860	530
	CR520	6	14.0		160	740	560	340
	CR532	6	11.5		160	740	560	340

Sizes may be limited by market.

AGRICULTURAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (kg)	Pressure (Kpa)
					Section Width	Overall Diameter		
5.50-16	CL877	10	10.0	4.00E	150	685	800	500
	CL521	16	10.0	10.00E	150	685	800	500
5.00-16	CL526	8	7.5	3.00D	130	665	550	420
	CL877	10	10.0	4.00E	130	665	650	500
	CM521	8	10.5	4.00E	130	655	550	420
		10	10.5	4.00E	130	655	650	500
5.00-14	CR881	8	8.5	3.00D	130	620	500	420
5.00-12	CB523	4	24.0	4.00E	145	590	280	200
4.50-16	CM521	6	10.5	3.00D	122	655	615	360
		8	10.5	3.00D	122	655	680	450
4.50-14	CR881	8	8.5	3.00D	122	595	485	300
	CM521	8	8.5	3.00D	122	595	485	300
4.50-16	CL877	8	10.0	3.00D	122	655	680	450
4.00-16	CR520	4	12.0	3.00D	112	620	435	275
4.00-10	CR823	6	6.0	3.00D	112	470	320	360
4.00-8	CM519	4	7.0	3.00D	112	415	225	275
	CL518	4	7.0	3.00D	112	415	225	275
	CL526	4	7.0	3.00D	112	415	225	275
	CL526	6	7.0	3.00D	112	415	305	390
	CR525	6	7.0	3.00D	112	415	305	390

Sizes may be limited by market.

INDUSTRIAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)	Pressure (Kpa)
					Section Width	Overall Diameter	Counter-balanced Lift Truck	
							Drive	25km/h
12.00-20	CL622	16	25.0	8.5	315	1125		700
	CL626	20	26.5	8.5	315	1173		880
10.00-20	CL626	18	26.5	7.5	278	1099		900
	CL622	16	22.0	7.5	278	1073		740
9.00-16	CL621	14	16.0	6.50H	255	890	4495	760
	CM623	14	15.0	6.50H	255	890	4495	760
8.25-20	CL621	14	15.0	6.5	235	974	4575	830
8.25-15	CL619	14	16.0	6.5	235	840	3775	830
	CL621	14	15.0	6.5	235	840	3775	830
	CL628	14	15.5	6.5	235	840	3775	830
	EDT	14	24.5	6.5	235	840	3775	830
8.25-12	CL618	12	13.0	5.00S	210	728	2000	700
	CL621	12	19.0	6.5	235	765	3060	720
	CL628	12	16.5	6.5	235	765	3060	720
7.50-15	EDT	14	21.5	6.0	215	780	3375	925
	CL619	12	17.0	6.0	215	780	3075	790
7.00-15	EDT	14	23.0	5.5	200	750	2870	1000
	CL619	12	15.0	5.5	200	750	2870	860
	EDT	14	22.0	5.00S	190	676	2670	1000
7.00-12	CL621	12	13.0	5.00S	190	676	2375	860
	CL619	12	15.0	5.00S	190	676	2375	860
	CL628	12	17.0	5.00S	190	676	2375	860
	CL619	10	13.0	5.00F	175	590	1655	790
	EDT	12	23.8	5.00F	175	590	1860	790
6.50-10	CL621	10	12.0	5.00F	175	590	1655	790
	CL628	10	15.0	5.00F	175	590	1655	790
	CL621	10	10.0	5.00S	190	590	1995	860
	CL618	10	10.0	5.00S	190	590	1995	860
7.00-9	CL628	10	13.0	5.00S	190	590	1995	860
	CL621	10	12.5	4.00E	160	540	1505	860
	EDT	12	19.3	4.00E	160	540	1675	1030
6.00-9	CL619	10	13.0	4.00E	160	540	1505	860
	CL628	10	13.0	4.00E	160	540	1505	860
	EDT	10	17.5	3.50D	137	470	1150	1000
	CL619	10	12.0	3.50D	137	470	1150	1000
5.00-8	CL621	10	11.0	3.50D	137	470	1150	1000
	CL618	6	7.0	3.00D	112	415	640	720
32×12-15	EDT	24	25.5	9.75BD	305	826	4240*	1030*
28×12-15	EDT	24	19.0	9.75BD	305	711	3240*	970*
28×9-15/815-15	EDT	14	20.6	7.0	220	710	3050	970
	CL621	14	18.5	7.0	220	710	3050	970
	CL628	14	16.0	7.0	220	710	3050	970
	CL619	14	13.0	7.0	220	710	3050	970
		16	13.0	7.0	220	710	3115	1000

Sizes may be limited by market.

INDUSTRIAL TIRES

Size	Pattern Code	PR	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)	Pressure (Kpa)
							Counter-balanced Lift Truck	
					Section Width	Overall Diameter	Drive	25km/h
18×7-8	CL619	14	14.0	4.33R	173	465	1440	900
	CL621	14	16.0	4.33R	173	465	1440	900
21×8-9	CL619	14	15.5	6.00E	200	535	2040	1000
23×9-10	CL619	16	16.0	6.50F	225	595	2810	1030
	CL621	16	14.0	6.50F	225	595	2810	1030
250-15	CL619	16	21.5	7.5	250	735	3865	930
300-15	CL619	18	22.0	8	300	840	5530	830
27×10-12	CL621	14	14.0	8.00G	255	690	3210	720
23×8.5-12	CL624	6	13.0	7JA	213	574	820*	340*
23×8.5-15	CL624	6	12.5	7JA	213	678	1030*	340*

Size	Pattern Code	PR	Type	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max.Load at Various Highest Speeds (kg)				Pressure (Kpa)
						Section Width	Overall Diameter	0km/h	5km/h	10km/h	25km/h	
18.00-25	CL629	40	TT/TL	65	13.0/2.5	520	1673	30600	24600	22900	21200	1140
	CL627	44	TL	43	13.0/2.5	510	1610	32700	26300	24500		1260
16.00-25	E3/L3	32	TT/TL	29	11.25/2.0	430	1490		18100	16900	15600	1050
14.00-24	CL629	24	TT	53	10.0	375	1370	17100	13775	12825	11875	860
12.00-24	CL629	20	TT	35	8.5	315	1247	12420	11005	9315	8625	910
		24	TT	35	8.5	315	1247	12420	11005	9315	8625	1150
	CL628	24	TT	35	8.5	315	1247	12420	11005	9315	8625	910

Sizes may be limited by market.

OFF THE ROAD TIRES

Size	Pattern Code	PR	Type	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)		Pressure (Kpa)	
						Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h
11.00-20	CS 726	16	TT		8.00	291	1070	5430		740	
12.00-24	CL 710	20	TT	35.0	8.5	315	1275	3750		900	
13.00-24	G2/L2	12	TT/TL	25.5	8.00TG	333	1278	2725	5600	300	450
		16	TT/TL	25.5	8.00TG	333	1278	3450	6500	375	600
14.00-24	G2/L2	12	TT/TL	25.5	8.00TG	362	1348	3075	6300	250	425
		16	TT/TL	25.5	8.00TG	362	1348	3650	7300	350	550
	E3/L3	16	TT/TL	25.5	10.0	362	1348	4000	7300	375	550
		24	TT/TL	25.5	10.0	362	1348	5150	9500	575	850
	CL 735	24	TT	42.0	10.00	375	1420	5150		950	
	CS 730	28	TT/TL		10	360	1360	13500		1100	
15.5-25	E3/L3	12	TT/TL	24.5	12.00/1.3	395	1275	3250	5600	250	400
16.00-25	E3/L3	28	TT/TL	29.0	11.25/2.0	430	1490	6700	11500	575	750
		32	TT/TL	29.0	11.25/2.0	430	1490		16875		1000
17.5L-24	R-4	12	TL	25.5	W15L	434	1241	2995		250	
17.5-25	E3/L3	12	TT/TL	25.0	14.00/1.5	445	1350	3650	6150	225	350
		16	TT/TL	25.0	14.00/1.5	445	1350	4250	7300	300	470
	CL 729	12	TL	26.0	14.00/1.5	445	1350	3650	6150	225	350
18.00-24	C-3	12	TT	35.0	13.00/2.5	495	1615	4750	8250	200	275
18.00-25	E3/L3	32	TT/TL	31.5	13.00/2.5	495	1615	8750	15000	575	750
		40	TT/TL	31.5	13.00/2.5	495	1615	9750	17000	700	950
19.5L-24	R-4	12	TL	27.0	DW16A	485	1314	3450		230	
21L-24	R-4	12	TL	27.5	DW18A	533	1378	3875		220	
20.5-25	CL 729	16	TT/TL	31.0	17.00/2.0	520	1490	5450	8250	275	350
		20	TT/TL	31.0	17.00/2.0	520	1490	6000	9500	325	450
23.1-26	C-7	12	TT/TL	17.0	DW20	595	1500	3600(30KM/H)		170	
23.5-25	CL 728	16	TT/TL	33.0	19.5/2.5	595	1615	6150	9500	225	300
		20	TT/TL	33.0	19.5/2.5	595	1615	7300	10900	300	375
26.5-25	E3/L3	28	TT/TL	39.0	22.0/3.0	675	1750	10000	15500	350	475

Sizes may be limited by market.

SKIDSTEER TIRES

Size	Pattern Code	PR	Type	Tread Depth (mm)	Standard Rim	New Tyre Inflated Dimensions (mm)		Max. Load (Kg)	Pressure (Kpa)
						Section Width	Overall Diameter		
23×8.5-12	CL624	6	TL	13.2	7.0-1-70	213	574	820	340
27×8.5-15	CL624	6	TL	12.7	75A-15	213	678	1030	340
10-16.5NHS (Normal)	CL718	8	TL	15.0	8.25	264	773	1880	410
		10	TL	15.0	8.25	264	773	2135	520
12-16.5NHS(Normal)	CL718	10	TL	18.0	9.75	307	831	2540	450
10-16.5NHS (Reinforced)	CL719	8	TL	16.0	8.25	264	773	1880	410
	CL720	12	TL	21.0	8.25	264	773	2375	620
12-16.5NHS (Reinforced)	CL719	10	TL	18.0	9.75	307	831	2540	450
	CL721	14	TL	28.5	9.75	307	831	3075	620
10-16.5NHS	CL722	10	TL	13.5	8.25	264	773	2135	520
	CL723	10	TL	18.0	8.25	264	773	2135	520
12-16.5NHS	CL722	12	TL	17.5	9.75	307	831	2865	550
	CL723	12	TL	20.0	9.75	307	831	2865	550
10-16.5NHS (Reinforced)	K192	8	TL	16.5	8.25	264	773	1880	410
		10	TL	16.5	8.25	264	773	2135	520
12-16.5NHS (Reinforced)	K192	10	TL	18.0	9.75	307	831	2540	450
		12	TL	18.0	9.75	307	831	2865	550

Sizes may be limited by market.

SOLID TYRES

CL401(S)

Size	Tread Depth (mm)	Standard Rim	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
					10km/h		16km/h		25km/h		16km/h Other Vehicles		
					Drive	Steer	Drive	Steer	Drive	Steer			
6.00-9	15.0	4.00E	140.0	525.0	1920	1535	1855	1390	1730	1295	1325	27.0	0.039
6.50-10	16.0	5.00F	156.0	574.0	2640	2110	2545	1910	2370	1780	1820	34.8	0.051
7.00-12	15.0	5.00S	160.0	655.0	3015	2410	2910	2185	2710	2035	2075	45.5	0.069
28×9-15	16.0	7.0	203.0	693.0	4090	3270	3945	2960	3675	2755	2820	59.7	0.097

CL402(S)

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
5.00-8	25.0	3.00D	click	128.0	460.0	1210	970	1175	880	1095	820	840	17.7	0.027
		3.25I				1320	1055	1275	955	1185	890	910	18.0	
		3.75				1520	1215	1470	1100	1365	1025	1050	18.1	
6.00-9	25.0	4.00E	click	146.0	523.0	1920	1535	1855	1390	1730	1295	1325	26.5	0.040
6.50-10	25.0	5.00F	click	156.0	574.0	2640	2110	2545	1910	2370	1780	1820	33.6	0.051
		5.50F				2900	2320	2800	2100	2605	1955	2000	34.0	
7.00-12	25.0	5.00S	click	160.0	655.0	3015	2410	2910	2185	2710	2035	2075	45.5	0.069
7.00-15	25.0	5.50S	click	180.0	730.0	3590	2870	3465	2600	3225	2420	2475	57.0	0.096
		6.0											58.0	
8.25-15	30.0	6.5	click	207.0	820.0	4940	3950	4765	3575	4440	3330	3405	87.0	0.139
	30.0	5.5		207.0	820.0	4180	3340	4030	3030	3760	2820	2880	86.5	0.139
28×9-15 (8.15-15)	25.0	6.5		197.0	681.0	3800	3035	3660	2750	3410	2560	2620	51.8	0.091
		7.0				4090	3270	3945	2960	3675	2755	2820	52.2	

Sizes may be limited by market.

SOLID TYRES

CL403(S)

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
4.00-8	20.0	3.00D	click	105.0	405.0	1055	845	1020	765	950	715	730	12.5	0.017
		3.75	click	105.0	405.0	1055	845	1020	765	950	715	730	12.5	0.017
5.00-8	25.0	3.00D	click	126.0	456.0	1210	970	1175	880	1095	820	840	17.0	0.026
15×4 1/2-8 (125/75-8)	20.0	3.00D	click	104.0	380.0	985	790	955	715	890	670	680	9.5	0.015
16×6-8 (150/75-8)	20.0	3.25I	click	104.0	380.0	985	790	955	715	890	670	680	10	0.015
		4.33R	click	146.0	406.0	1500	1200	1445	1085	1345	1010	1035	15.5	0.024
18×7-8 (180/70-8)	25.0	4.33R	click	158.0	455.0	2350	1880	2265	1700	2110	1585	1620	22.0	0.033
6.00-9	25.0	4.00E	click	146.0	525.0	1920	1535	1855	1390	1730	1295	1325	26.5	0.040
7.00-9	30.0	5.00S		168.0	550.0	2730	2015	2605	1925	2370	1750	1835	35.0	0.051
21×8-9 (200/75-9)	25.0	6.00E	click	182.0	518.0	2810	2250	2715	2035	2530	1895	1940	33.0	0.049
23×9-10 (225/75-10)	25.0	6.50F	click	200.0	580.0	3420	2735	3300	2475	3075	2305	2355	46.0	0.067
200/50-10	20.0	6.50F	click	196.0	457.0	2470	1974	2240	1680	1900	1425	1678	25.0	0.041
6.50-10	25.0	5.00F	click	156.0	570.0	2640	2110	2545	1910	2370	1780	1820	33.8	0.051
7.00-12	30.0	5.00S	click	170.0	654.0	3015	2410	2910	2185	2710	2035	2075	46.5	0.073
8.25-12	35.0	5.00S		195.0	720.0	3325	2660	3215	2410	2995	2245	2295	64.2	0.101
23×10-12 (250/60-12)	25.0	8.00G	click	240.0	585.0	4005	3205	3845	2885	3605	2705	2765	51.8	0.082
27×10-12 (250/75-12)	30.0	8.00G	click	240.0	676.0	4465	3570	4315	3235	4020	3015	3080	73.5	0.110
28×9-15 (8.15-15) (225/75-15)	25.0	7.0	click	215.0	700.0	4090	3270	3945	2960	3675	2755	2820	60.9	0.105
28×12.5-15(315/50-15)	30.0	9.75	click	300.0	706.0	5735	4590	5540	4165	5170	3890	3965	88.8	0.150
32×12.1-15(355/65-15)(350-15)	30.0	9.75	click	290.0	808.0	7800	5850	7080	5310	6000	4500	6400	123.0	0.189
250-15 (250/70-15)	30.0	7.0	click	236.0	720.0	4760	3805	4300	3225	3650	2740	3225	73.0	0.122
		7.5	click	236.0	720.0	4760	3805	4300	3225	3650	2740	3225	73.5	0.122
300-15 (315/70-15)	30.0	8.0	click	254.0	813.0	5990	4790	5780	4335	5380	4035	4130	108.0	0.168
7.50-15(30)	30.0	5.5		190.0	750.0	3690	2950	3425	2570	3190	2395	2450	68.0	0.107
		6.5		190.0	750.0	4360	3490	4050	3040	3775	2835	2890	69.0	0.107
8.25-15	35.0	5.5		203.0	818.0	4180	3340	4030	3030	3760	2820	2880	88.5	0.136
		6.5		203.0	818.0	4940	3950	4765	3575	4440	3330	3405	88.5	0.136
7.50-16	30.0	5.5		190.0	814.0	3910	3130	3780	2835	3520	2640	2700	78.0	0.126
		6.0		190.0	814.0	4210	3370	4070	3055	3790	2845	2910	78.8	0.126
8.00-16	30.0	5.5		205.0	820.0	4175	3335	4035	3020	3760	2820	2890	86.5	0.138
8.25-20	45.0	6.5		220.0	960.0	5425	4340	5240	3930	4880	3735	3745	123.0	0.203
		7.0		220.0	960.0	5845	4675	5645	4235	5255	4025	4035	123.6	0.203
9.00-20、10.00-20	45.0	6.5		246.0	1010.0	5990	4790	5780	4335	5380	4035	4130	149.0	0.251
		7.0		246.0	1010.0	6450	5160	6235	4675	5805	4355	4450	151.0	0.251
		7.5		246.0	1010.0	7240	5795	6995	5245	6510	4885	4995	153.0	0.251
		8.0		246.0	1010.0	7725	6180	7460	5595	6945	5210	5330	155.0	0.251
11.00-20	45.0	8.0		280.0	1085.0	8270	6615	7940	5955	7445	5585	5670	218.0	0.330
12.00-20	45.0	8.0		260.0	1088.0	8455	6755	8165	6125	7600	5700	5830	195.0	0.308
		8.5		260.0	1088.0	8455	6755	8165	6125	7600	5700	5830	197.0	0.308
14.00-20	45.0	10.00W		362.0	1278.0	9180	7335	8860	6645	8245	6185	6340	408.0	0.591

Sizes may be limited by market.

SOLID TYRES

CL404(S)

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
9.00-16	25.0	6.50H		230	860	5135	4110	4965	3725	4625	3470	3550	112.0	0.170
		7.00N		230	860	5530	4425	5345	4010	4980	3735	3820	113.0	0.170
10.00-20	25.0	7.0		260.0	1042.0	6450	5160	6235	4675	5805	4355	4450	184.0	0.282
		7.5		260.0	1042.0	7240	5795	6995	5245	6510	4885	4995	185.0	0.282
		8.0		260.0	1042.0	7725	6180	7460	5595	6945	5210	5330	186.0	0.282
12.00-20	25.0	8.0		290.0	1120.0	8455	6755	8165	6125	7600	5700	5830	241.0	0.364
		8.5		290.0	1120.0	8455	6755	8165	6125	7600	5700	5830	242.0	0.364
12.00-24	30.0	8.5		306.0	1216.0	9570	7655	9235	6925	8600	6450	6595	283.0	

Sizes may be limited by market.

SOLID TYRES

GHT01(S)

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
3.50-5	13.0	3		102.0	298.0	760	610	735	550	685	515	525	6	0.009
5.00-8	18.0	3.00D	click	130.0	450.0	1210	970	1175	880	1095	820	840	17.0	0.026
6.00-9	18.0	4.00E	click	150.0	525.0	1920	1535	1855	1390	1730	1295	1325	26.8	0.041
7.00-9	20.0	5.00S		168.0	550.0	2730	2015	2605	1925	2370	1750	1835	34.0	0.051
6.50-10	18.0	5.00F	click	160.0	570.0	2640	2110	2545	1910	2370	1780	1820	34.5	0.052
7.00-12	18.0	5.00S	click	170.0	654.0	3015	2410	2910	2185	2710	2035	2075	46.5	0.073
8.25-12	25.0	5.00S		190.0	720.0	3325	2660	3215	2410	2995	2245	2295	65.0	0.098
5.50-15	22.0	4.50E		150.0	672.0	2525	1870	2415	1790	2195	1625	1690	38.8	0.068
16×6-8 (150/75-8)	15.0	4.33R	click	152.0	412.0	1500	1200	1445	1085	1345	1010	1035	16.0	
18×7-8	18.0	4.33R	click	162.0	456.0	2350	1880	2265	1700	2110	1585	1620	22	0.034
21×8-9 (200/75-9)	18.0	6.00E	click	182.0	518.0	2810	2250	2715	2035	2530	1895	1940	33.0	0.049
23×9-10 (225/75-10)	25.0	6.50F	click	210.0	580.0	3420	2735	3300	2475	3075	2305	2355	46.6	0.071
28×9-15 (8.15-15) (225/75-15)	20.0	6.5		215.0	700.0	4090	3270	3945	2960	3675	2755	2820	63.0	0.105
		7.0		215.0	700.0	4090	3270	3945	2960	3675	2755	2820	63.6	0.105
7.00-15	25.0	5.50S		194.0	736.0	3590	2870	3465	2600	3225	2420	2475	64.5	0.105
		6.0		194.0	736.0								65.0	0.105
8.25-15	25.0	5.5		212.0	820.0	4180	3340	4030	3030	3760	2820	2880	92.0	0.143
		6.5		212.0	820.0	4940	3950	4765	3575	4440	3330	3405	92.6	0.143
300-15 (315/70-15)	25.0	8.0	click	256.0	813.0	5990	4790	5780	4335	5380	4035	4130	108.4	0.169
8.25-20	30.0	6.5		220.0	960.0	5425	4340	5240	3930	4880	3735	3745	123.0	0.203
		7.0		220.0	960.0	5845	4675	5645	4235	5255	4025	4035	123.8	0.203
9.00-20	30.0	6.5		235.0	1010.0	5990	4790	5780	4335	5380	4035	4130	147.5	0.240
		7.0		235.0	1010.0	6450	5160	6235	4675	5805	4355	4450	148.2	0.240

Sizes may be limited by market.

SOLID TYRES

RIB01(S)

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
3.20-8	2.0	3.0		110.0	325.0	830	665	795	595	745	560	575	6.4	0.012
15×4 1/2-8	4.0	3.00D	click	104.0	380.0	985	790	955	715	890	670	680	9.5	0.015
		3.25I	click	104.0	380.0	985	790	955	715	890	670	680	10	0.015
4.00-8	4.0	3.00D	click	105.0	405.0	1055	845	1020	765	950	715	730	12.5	0.017
		3.75	click	105.0	405.0	1055	845	1020	765	950	715	730.0	12.5	0.017

SM

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
10.00-20		7.5		240.0	1020.0	7240	5795	6995	5245	6510	4885	4995	170.8	0.250

GHT01H

Size	Tread Depth (mm)	Standard Rim	Click	Section Width	Overall Diameter (mm)	Max. Load at Various Highest Speeds (kg)							Weight (kg)	Volumn (m³)
						10km/h		16km/h		25km/h		16km/h Other Vehicles		
						Drive	Steer	Drive	Steer	Drive	Steer			
6.00-9	18.0	4.00E		150.0	525.0	1920	1535	1855	1390	1730	1295	1325	25	0.041
6.50-10	18.0	5.00F		160.0	570.0	2640	2110	2545	1910	2370	1780	1820	33	0.052
7.00-12	18.0	5.00S		170.0	654.0	3015	2410	2910	2185	2710	2035	2075	45	0.073
28×9-15 (8.15-15) (225/75-15)	20.0	6.5		215.0	700.0	4090	3270	3945	2960	3675	2755	2820	63.0	0.105
		7.0		215.0	700.0	4090	3270	3945	2960	3675	2755	2820	63.5	0.105
7.00-15	25.0	5.50S		194.0	736.0	3590	2870	3465	2600	3225	2420	2475	61.0	0.105
		6.0		194.0	736.0								61.6	0.105
8.25-15	25.0	5.5		212.0	820.0	4180	3340	4030	3030	3760	2820	2880	92.0	0.143
		6.5		212.0	820.0	4940	3950	4765	3575	4440	3330	3405	92.5	0.143
250-15 (250/70-15)	20.0	7.0		236.0	720.0	4760	3805	4300	3225	3650	2740	3225	74.0	0.122
		7.5		236.0	720.0	4760	3805	4300	3225	3650	2740	3225	74.5	0.122
300-15 (315/70-15)	25.0	8.0		264.0	815.0	5990	4790	5780	4335	5380	4035	4130	115.0	0.175

Sizes may be limited by market.